

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Plated:See Ordering Information

Rating:

Current Rating:3.5 Amp

Voltage Rating:250V AC/DC


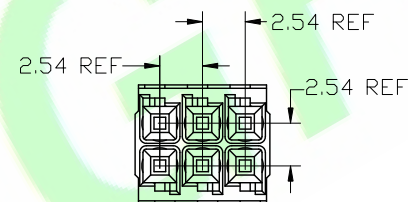
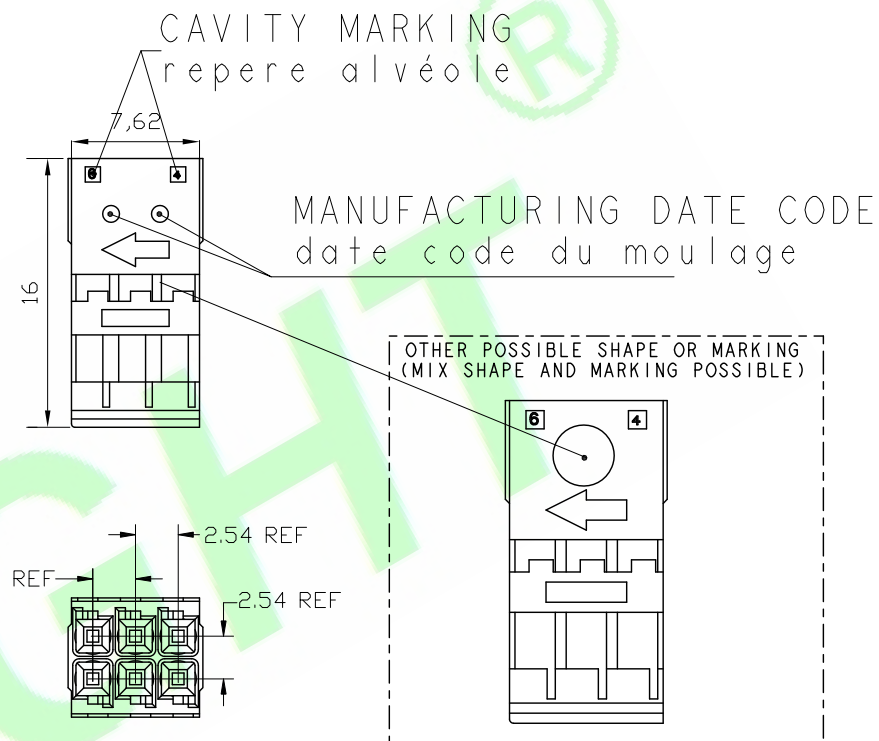
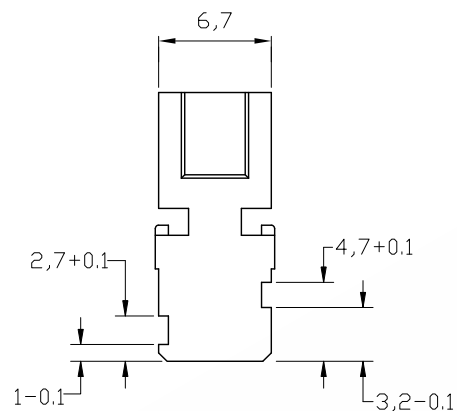
Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

MOLD CAVITY NUMBER
n° d'empreinteCAVITY MARKING
repere alveole**Ordering Information**

H25414F-XXP-XX

1 2 3 4 5

- 1: — Series No.
2: — F: Female
3: — No. of Positions
4: — N: Natural
B:Black
5: — A:In Bag
C:In Tray

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H25414F-XXP-XX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED THIRD ANGLE PROJECTION A4		
4X					CHKD.: Tony	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°			
2X					x.x: ±0.20	x.x': ±3.0°				
1X	ORIGINAL	Deng			x.xx: ±0.15	x.xx': ±2.0°		SHEET: 1/1		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 19-May-2023	SCALE: 1:1		
								UNIT: mm		