

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Color:See Ordering Information

Rating:

Current Rating:7.5 Amp (22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information

H25414F2-02-XA



1 2 3 4 5

- 1:— Series No.
2:— F:Female
3:— No. of Positions
4:— A:A Type Black
B:B Type Natural
5:— A:In Bag

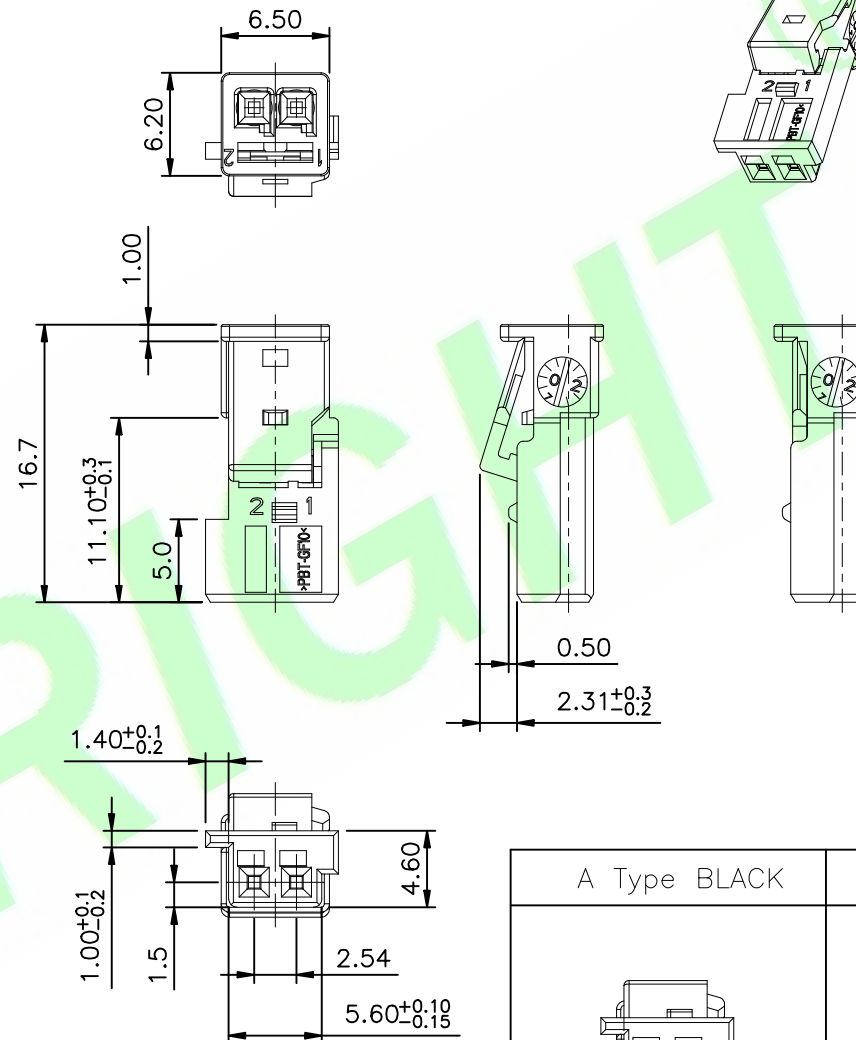

A Type BLACK

B Type NATURAL



5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H25414F2-02-XA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Ren	x.: ±	x': ±	TITLE : 2.54mm Pitch 02P Female Housing		SHEET: 1/1		A4	
2X					x.x: ±0.30	x.x': ±			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx': ±	DATE: 15-Aug-2021		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.			x.xxx: ±0.10			x.xxx': ±			