

Specifications:

Material And Finish:

Insulator: PBT UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 3.5 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+120^{\circ}\text{C}$

Ordering Information

H25414M-06-XXA

1 2 3 4 5 6

1: — Series No.

2: — M: Male

3: — No. of Positions

4: — B: Black


N: Natural

5: — A: A Type

B: B Type


6: — A: In Bag

A Type







BLACK

B Type



NATURAL

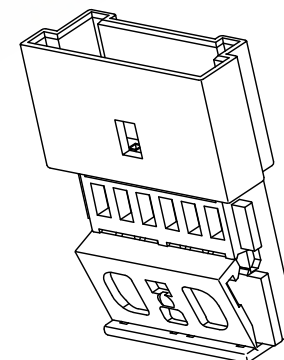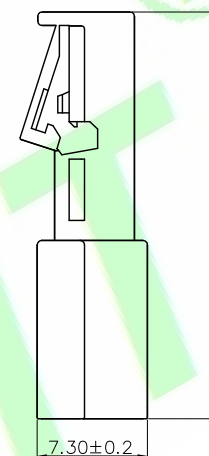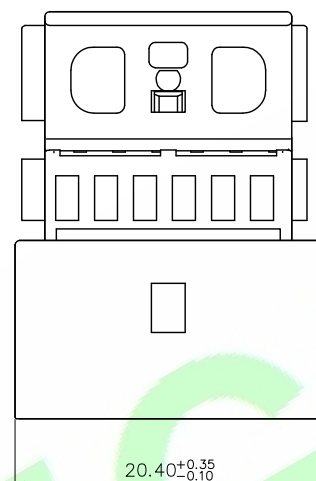

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : H25414M-06-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		 THIRD ANGLE PROJECTION	A4
4X				Mark	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	X: ±	X': ±	TITLE :				
2X				Ren	X.X: ±0.30	X.X': ±	2.54mm Pitch 06P Male Housing				
1X	ORIGINAL	Mark		APPD.:	X.XX: ±0.20	X.XX': ±	DATE: 19-Aug-2021	SHEET: 1/1			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±		SCALE: 1:1			
								UNIT: mm			