

VERSION I / Variante I
(WITHOUT LOCKING PART / ohne Anreihement)

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Plated:See Ordering Information

Rating:

Current Rating:3.5Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-40°~+120°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

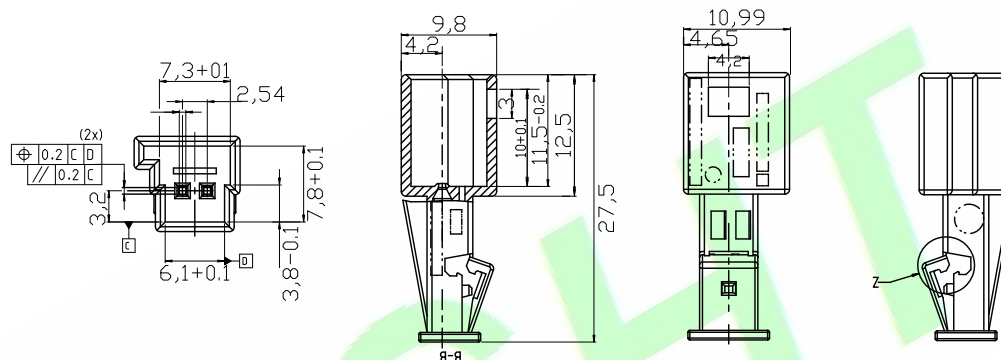

Ordering Information

H25414M-XXP-XXXX
1 2 3 4 5 6

1: — Series No.

2: — M: Male Housing

3: — No. of Positions

4: — N: Natural

B:Black

5: — 01:A Type


02:B Type

03:C Type

04:D Type

6: — A:In Bag

C:In Tray

TOOL 4 AND FURTHER TOOLS
Werkzeug 4 und weitere Werkzeuge


Variante I

A Type

B Type

C Type

D Type

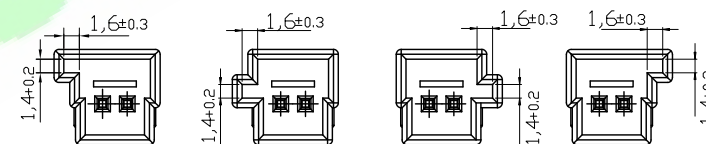
VERSION II
Variante II

A Type

B Type

C Type

D Type

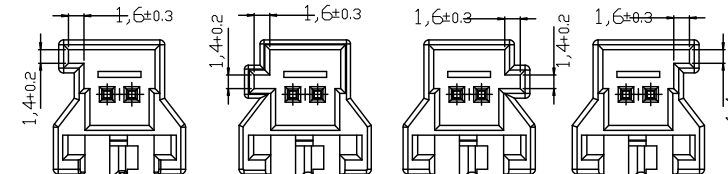

5X				DR.BY.: Deng	GENERAL TOLERANCE:		PART NO : H25414M-XXP-XXXX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X					LINEAR ANGLES		DWG. NO.:						
3X				CHKD.: Tony	x.: ±0.30 x': ±5.0'	TITLE : 2.54mm Pitch Housing		SHEET: 1/1					A4
2X					x.x: ±0.20 x.x': ±3.0'			SCALE: 1:1					
1X	ORIGINAL	Deng		APPD.:	x.xx: ±0.15 x.xx': ±2.0'			UNIT: mm	THIRD ANGLE PROJECTION				
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10 x.xxx': ±1.0'	DATE: 19-May-2023							