

Specifications:

Material And Finish:

Insulator: PBT+GF20 UL94V-0

Color: See Ordering Information

Rating:

Current Rating: 7.5 Amp

Voltage Rating: 24V AC/DC

Operating Temperature






Range: -40~+85°C

Electrical:

Contact resistance: 8m Ohm Max



Insulator resistance: 100M Ohm min.

Withstanding Voltage: 1000V AC/Minute

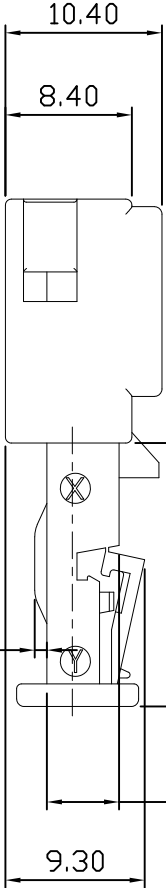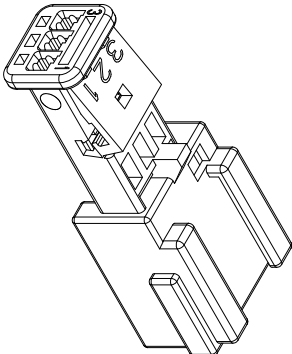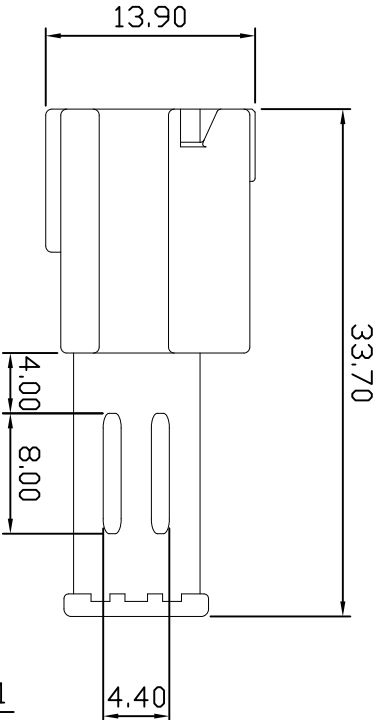

SEE DETAIL Z

- 1: — Series No.
2: — M: Male Housing
3: — No. of Positions
4: — 01: A Type Black
02: B Type White
03: C Type Blue
04: D Type Yellow
05: E Type Grey
06: F Type Brown
5: — A: In Bag

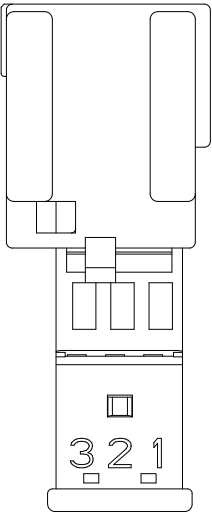

5X				DR.BY:		GENERAL TOLERANCE:		PART NO.: H25414M1-03P-XX-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm THIRD ANGLE PROJECTION A4			
4X				Judyyan		LINEAR		DWG. NO.:					
3X				CHKD:		ANGLES							
2X				Aren		X.: ±	X': ±	TITLE:					
1X						X.X: ±0.30	X.X': ±	2.54mm Pitch Male Housing					
REV						X.XX: ±0.20	X.XX': ±	DATE: 19-Aug-2021					
				APPD:		X.XXX: ±0.10	X.XXX': ±						
				Billy									
				ECN. NO.									