

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

TPA:PBT Color:Natural

Rating:

Voltage Current:3A(22AWG)

Voltage Rating:24V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Insulator resistance:20M ohm min.

Withstanding Voltage:1000V DC/Minute

Ordering Information

H25416M-10P-01-A





1	2	3	4
---	---	---	---

1: — Series No.


2: — M:Male Housing

3: — No. of Positions

4: — A:In Bag

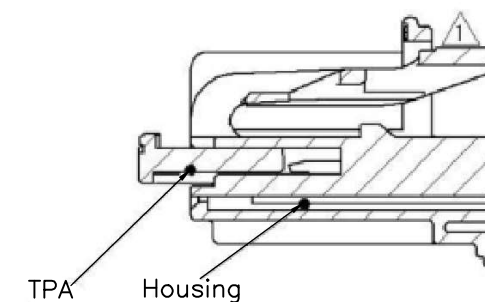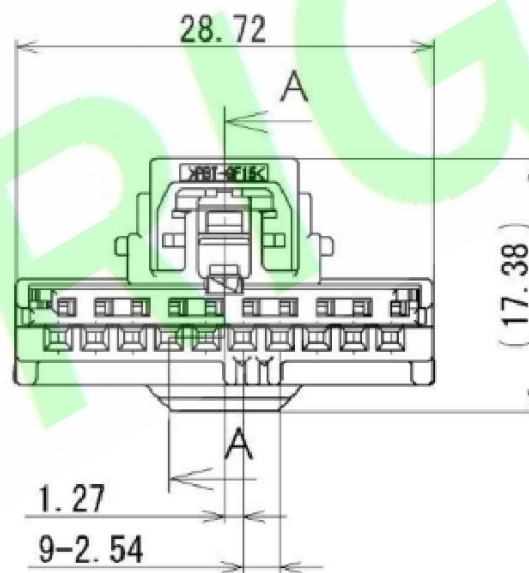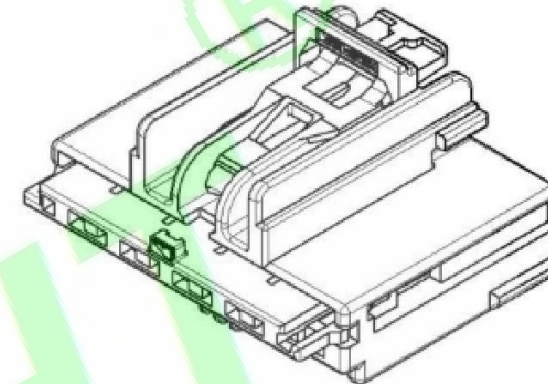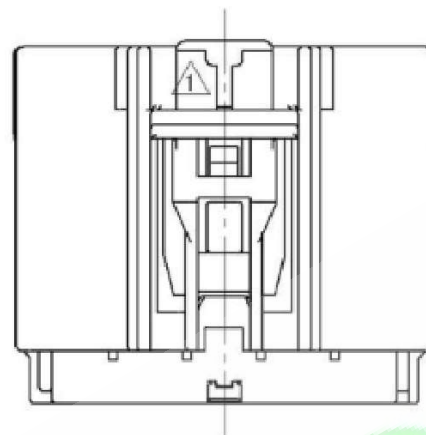

SEC. A-A

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H25416M-10P-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES	DWG. NO.:				
CHKD.: Tony	x.: ±0.40	x': REF±6°	TITLE : Pitch 2.54mm Connector Housing		SHEET: 1/1		A4
	x.x: ±0.35	x.x': ±3.0°			SCALE: 1:1		
APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°	DATE: 16-Sep-2023		UNIT: mm		
	x.xxx: ±0.15	x.xxx':					