


Specifications:
Material And Finish:
Contact:Brass
Wire Range:0.3~0.85mm²
Insulation O.D.:1.90mm(Max)


Rating:
Current Rating:5 Amp
Voltage Rating:14V DC
Operating Temperature Range:-40°C~+105°C

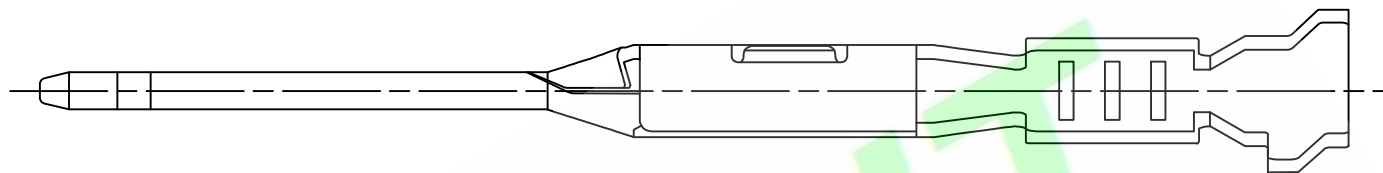

Ordering Information
H254170TM-PQ-XX

1 2 3 4

- 1: — Series No.
2: — TM:Male Terminal
3: — Q: Tin Plated
H: Gold flash on contact;
Other Tin Plated
4: — 01: 0.3~0.5mm²
02: 0.75~0.85mm²

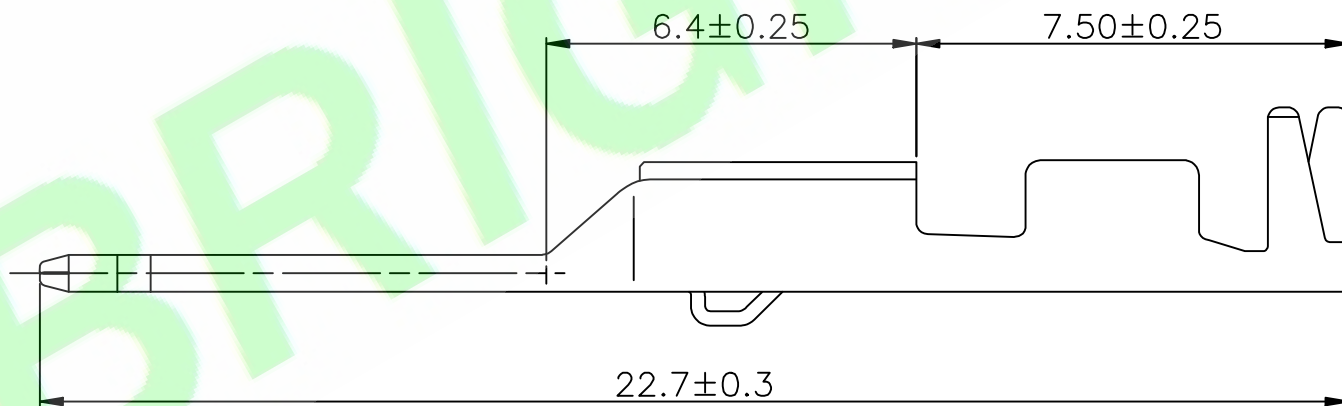


1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H254170TM-PQ-XX
	LINEAR	ANGLES	
CHKD.: Hu.ch	x.: ±0.30	x': ±5.0°	DWG. NO.:
	x.x: ±0.20	x.x': ±3.0°	
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	TITLE : 2.54mm Pitch Female Terminal
	x.xxx: ±0.10	x.xxx': ±1.0°	
			DATE: 28-Nov-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4