

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0


Rating:
Current Rating:5 Amp
Voltage Rating:14V DC
Operating Temperature Range:-40°C~+105°C

Electrical:
Contact resistance:15m Ohm Max
Insulator resistance:100M ohm min.




Ordering Information

H25417F-XXP-01-XA




- 1: — Series No.
2: — F:Female Housing
3: — No. of Positions
4: — Color
B:Black
N:Natural
GR:Gray
GN:Green
O:Orange
5: — A:In Bag






2PIN





3PIN

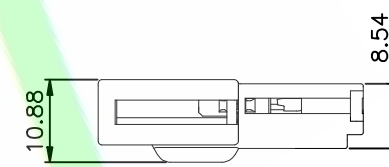

6PIN



7PIN



DR.BY:
Judyyan

CHKD.:
Aren

APPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
x.: ±0.30	x': ±5.0°
x.x: ±0.20	x.x': ±3.0°
x.xx: ±0.15	x.xx': ±2.0°
x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : H25417F-XXP-01-XA

DWG. NO.:

TITLE :

2.54mm Pitch Female Housing


DATE: 28-Nov-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO.