

RoHS Compliant

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0 Color: Natural
Plated:See Ordering Information




Rating:
Current Rating:3.0 Amp (22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information

H2542-XXP-02-NA
1 2 34

1:—Series No.
2:—No.of Positions
3:—N:Natural
4:—A:In Bag

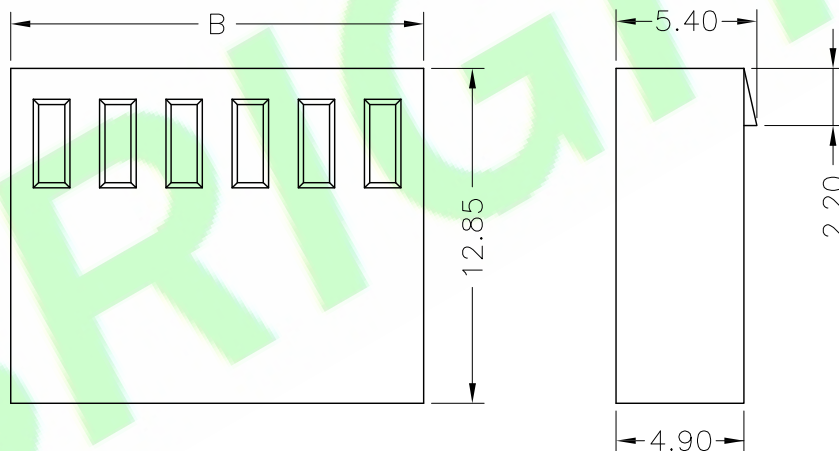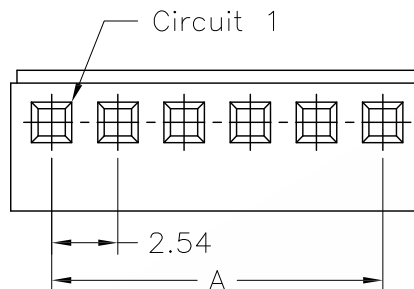

Circuit No.	Dimensions	
	A	B
02	2.54	5.68
03	5.08	8.22
04	7.62	10.76
05	10.16	13.30
06	12.70	15.84
07	15.24	18.38
08	17.78	20.92
09	20.32	23.46
10	22.86	26.00
11	25.40	28.54
12	27.94	31.08
13	30.48	33.62
14	33.02	36.16
15	35.56	38.70
16	38.10	41.24
17	40.64	43.78
18	43.18	46.32
19	45.72	48.86
20	48.26	51.40

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H2542S-XXP-02-NA		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X				Bruce	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.:	x': ±	TITLE : 2.54mm Pitch Housing				
2X		Deng	20230602	Aaron	x.x: ±0.30	x.x': ±					
1X		Bruce		APPD.:	x.xx: ±0.20	x.xx': ±					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±	DATE: 12-Jan-2022				

A4