

Specifications:
Material: Phosphor Bronze

Rating:
Current Rating: 3.0Amp(22AWG)
Voltage Rating: 250V AC/DC


Electrical:
Contact resistance: 15m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1000V AC/Minute
Wire Range: AWG #20-#26


Ordering Information

H2543T-PX

1 2 3

- 1: — Series No.
2: — Terminal
3: — A: Gold flash
Q: Tin Plated

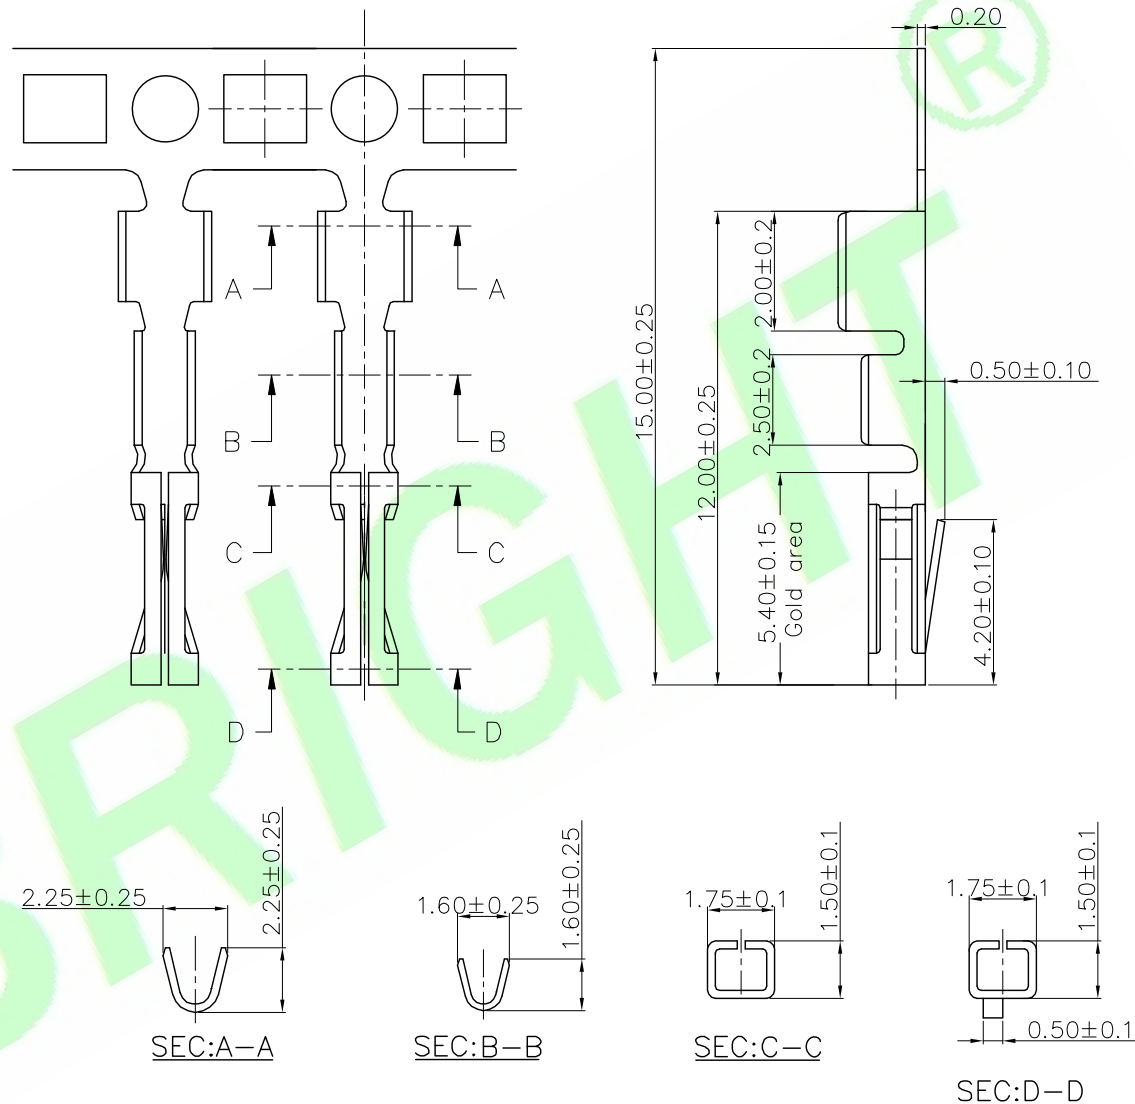

5X				DR.BY.: Apra	GENERAL TOLERANCE:		PART NO : H2543T-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR	ANGLES					DWG. NO.:			
3X	Update technical parameters	Deng	20230602	CHKD.: Aaron	x.: ±	x*: ±	TITLE : 2.54mm Pitch Crimp Terminal					SHEET: 1/1		A4
2X	Update code options	Judyyan	20221102		x.x: ±0.25	x.x*: ±						SCALE: 1:1		
1X	ORIGINAL	Apra		APPD.: Billy	x.xx: ±0.15	x.xx*: ±		UNIT: mm	THIRD ANGLE PROJECTION					
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.05	x.xxx*: ±	DATE: 24-Nov-2017							