

RoHS Compliant





Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Plated:See Ordering Information

Rating:
Current Rating:3.0Amp (22AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
H254500 - XXP - 01 - XA
 1 2 34

1:—Series No.
2:—No.of Positions
3:—N:Natural
 B:Black
 L:Bule
4:—A:In Bag

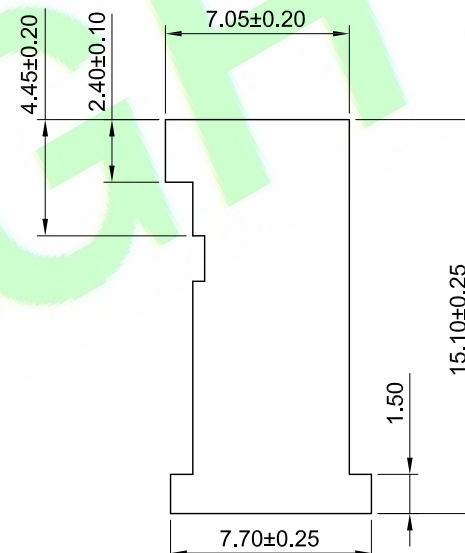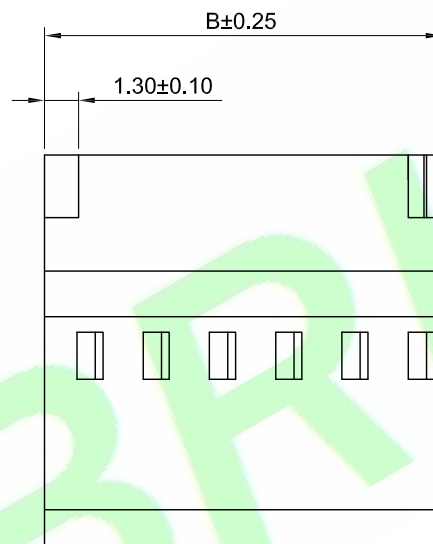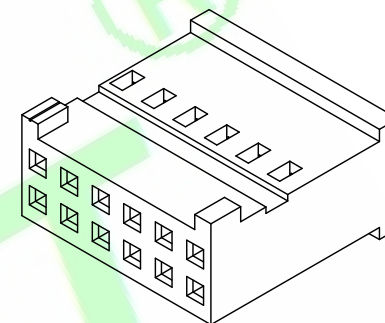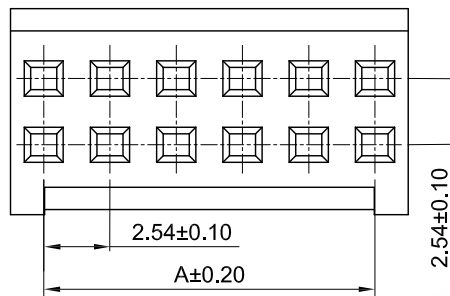

Circuits	Dimensions(mm)	
	A	B
2x2P	2.54	5.08
2x3P	5.08	7.62
2x4P	7.62	10.16
2x5P	10.16	12.70
2x6P	12.70	15.24
2x7P	15.24	17.78
2x8P	17.78	20.32
2x9P	20.32	22.86
2x10P	22.86	25.40
2x12P	27.94	30.48
2x15P	35.56	38.10
2x18P	43.18	45.72

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H254500-XXP-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Bruce	LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.:	X.:	X': ±	TITLE :	SHEET: 1/1		A4
2X		Deng	20230606	Aren	X.X: ±0.30	X.X': ±	2.54mm Pitch Housing	SCALE: 1:1		
1X		Bruce		APPD.:	X.XX: ±0.20	X.XX': ±		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±	DATE: 12-Jan-2022			