

Specifications:

Material And Finish:




Insulator: PBT UL94V-0 Black;
 Waterproof ring: Silicone rubber, Chestnut brown ;
 Contact: Copper alloys;
 Metal sleeve: Stainless steel
 Plated: See Ordering Information;

Rating:

Operating Temperature Range: -55~+125°C;
 Waterproof rating: IP67&IP69K;

Electrical:


Insulator resistance: 1000M ohm min.;
 Withstanding Voltage: 1500V AC/Minute.

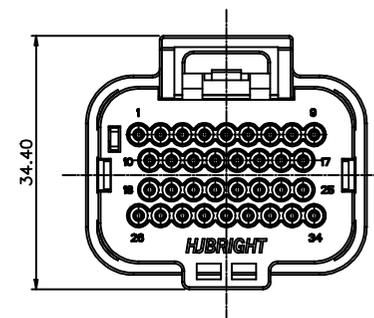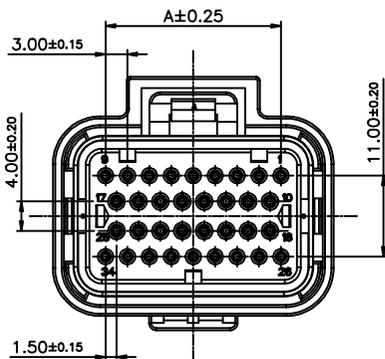



Ordering Information
 H300003M-XXP-XX-A

1 2 3 4 5

- 1: Series No.
- 2: M: Male Housing
- 3: No. of Positions
- 4: 01: KEY-A
02: KEY-B
- 5: A: In Bag



PIN No.	A	B	C	D
26	18.0	23.4	32.4	12.0
34	24.0	29.4	38.4	18.0

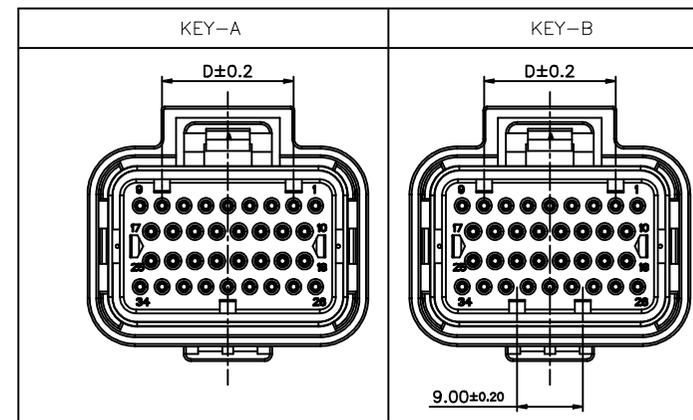

5X			
4X			
3X			
2X			
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Hu.CH	
CHKD.:	Sam	
APPD.:	Billy	
GENERAL TOLERANCE:		
	LINEAR	ANGLES
	X.: ±0.35	x.: ±5.0°
	X.X: ±0.25	x.X: ±3.0°
	X.XX: ±0.15	x.XX: ±2.0°
	X.XXX: ±0.15	x.XXX: ±1.0°

PART NO :	H300003M-XXP-XX-A
DWG. NO.:	
TITLE :	3.0Pitch Waterproof Housing
DATE:	02-Dec-2025

HJBRIGHT 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4