

Specifications:

Material:

Insulator:PA66 UL94V-0

Rating:

Current Rating:8A AC/DC

Voltage Rating:250V AC/DC


Operating Temperature Range:-25°C~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

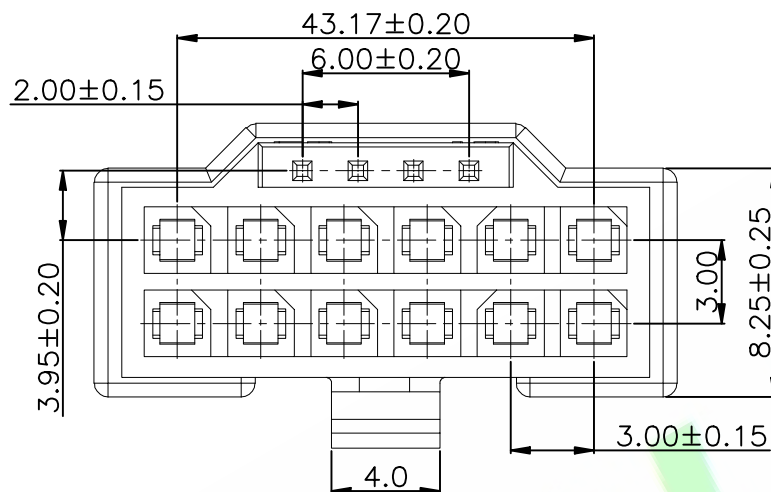

Ordering Information

H30002M-16P-01-BA

1 2 3 45



1:—Series No.

2:—M:Male

3:—No. of Positions

4:—B:Black

5:—A:In Bag

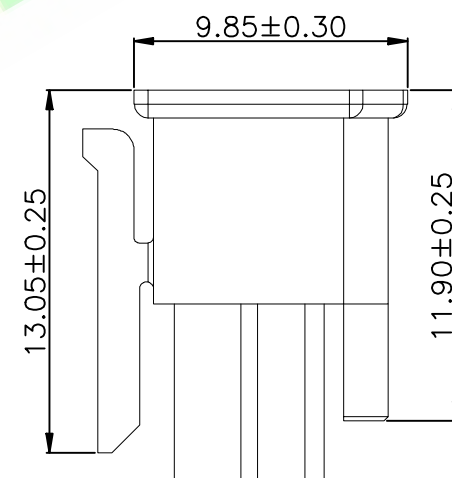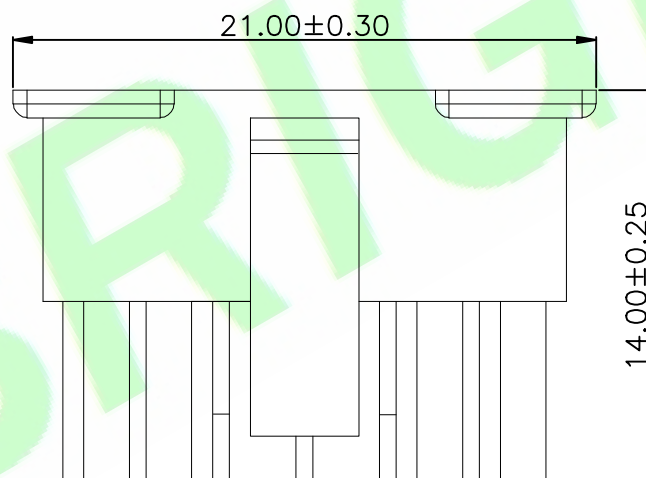

1X	ORIGINAL	Jamin	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Jamin	GENERAL TOLERANCE:		PART NO : H30002M-16P-01-BA
	LINEAR	ANGLES	
CHKD.: Judyyan	X.: ±0.25	X*: ±3.0°	DWG. NO.:
	X.X: ±0.20	X.X*: ±2.0°	
APPD.: Billy	X.XX: ±0.20	X.XX*: ±1.0°	TITLE : 3.00&2.00mm Pitch Housing
	X.XXX: ±0.05	X.XXX*: ±0.5°	
			DATE: 14-May-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4