

RoHS Compliant


Specifications:
Material And Finish
Insulator:Nylon66 UL94V-0

Rating:
Current Rating:8.5Amp(2P/18AWG)
Voltage Rating:600V AC/DC
Operating Temperature Range:-40°C~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute


Ordering Information & Dimensions

| Poles | Dimension | |
|-------|-----------|-------|
| | A | B |
| 02 | 3.00 | 8.28 |
| 03 | 6.00 | 9.85 |
| 04 | 9.00 | 12.85 |
| 05 | 12.00 | 15.85 |
| 06 | 15.00 | 18.85 |
| 07 | 18.00 | 21.85 |
| 08 | 21.00 | 24.85 |
| 09 | 24.00 | 27.85 |
| 10 | 27.00 | 30.85 |
| 11 | 30.00 | 33.85 |
| 12 | 33.00 | 36.85 |

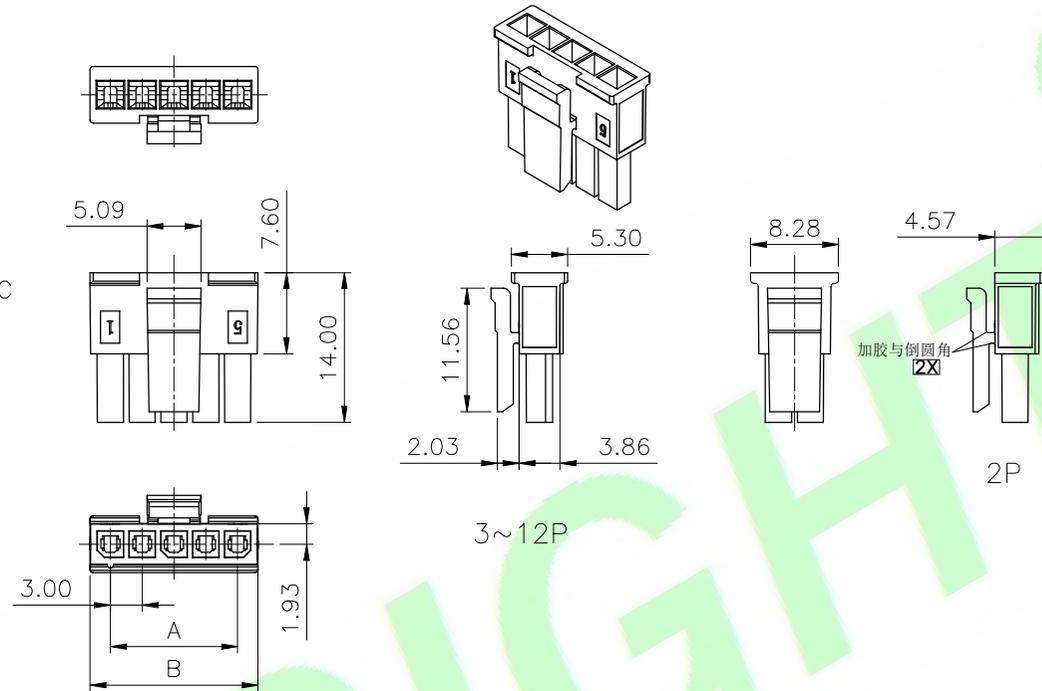

Ordering Information
H3001-XXP-01-XXA

- 1: — Series No.
- 2: — No. of Positions
- 3: — N:Natural
B:Black
- 4: — G:Glowing Filament
V:94V-0
- 5: — A:In Bag

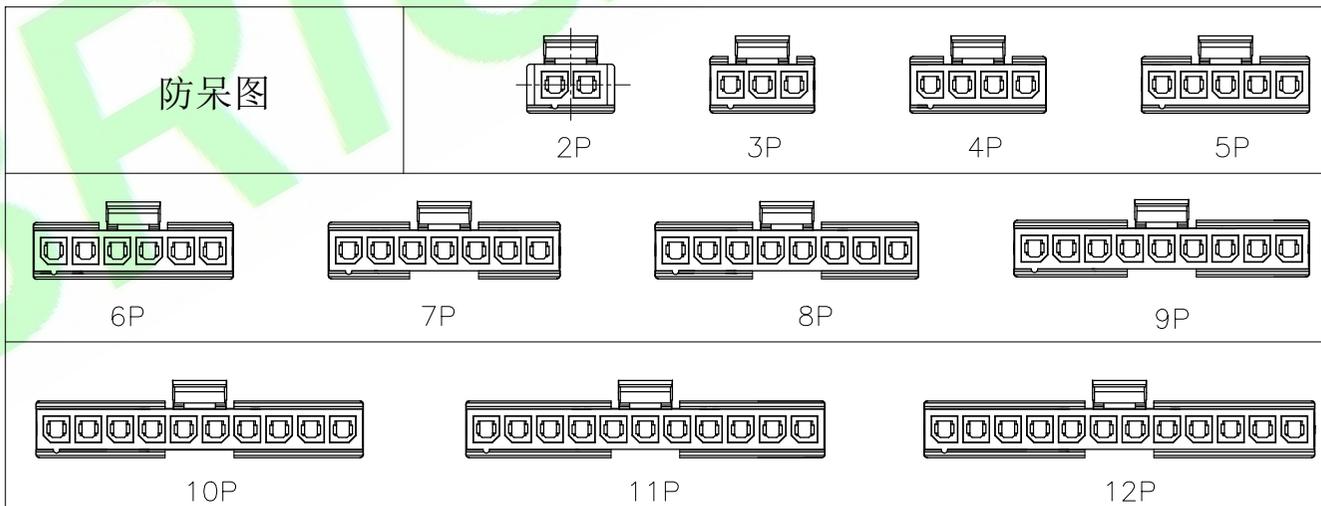

| | | | | | | | | |
|------|---------------------|---------|----------|-------------------|--------------------|-----------|--|--|
| 5X | | | | DR.BY.: Sophia | GENERAL TOLERANCE: | | PART NO : H3001-XXP-01-XXA | |
| 4X | | | | CHKD.: Tony | LINEAR | ANGLES | DWG. NO.: | |
| 3X | Update code options | Judyyan | 20220905 | APPD.: Billy | X.: ±0.30 | X': ±1.0° | TITLE : 3.00mm Crimp Style connectors | |
| 2X | 加胶与倒圆角 | Mark | 20220115 | | X.XX: ±0.20 | X.XX': | DATE: 04-Dec-2020 | |
| 1X | ORIGINAL | Sophia | | | X.XXX: ±0.10 | X.XXX': | | |
| REV. | DESCRIPTION | DR.BY | ECN. NO. | | | | | |

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4