

RoHS Compliant

Specifications:

Material And Finish

Insulator:PA66, UL94V-0

Rating:

Current Rating:7A AC/DC(2P/18AWG)

Voltage Rating:600V AC/DC


Operating Temperature Range:-40°C~+125°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

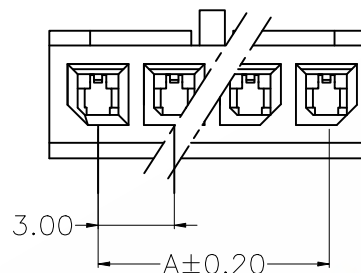

Circuits	Dimension	
	A	B
2	3.00	6.85
3	6.00	9.85
4	9.00	12.85
5	12.00	15.85
6	15.00	18.85
7	18.00	21.85
8	21.00	24.85
9	24.00	27.85
10	27.00	30.85
11	30.00	33.85
12	33.00	36.85

Ordering Information


H3001F-XXP-XX-XXA

1 2 3 4 5 6 7


- 1: — Series No.
2: — F:Female Housing
3: — No. of Positions
4: — 01: A Type
02: B Type

- 5: — B: Black
N: Natural
6: — G:Glowing Filament
Blank:UL94V-0


- 7: — A:In Bag

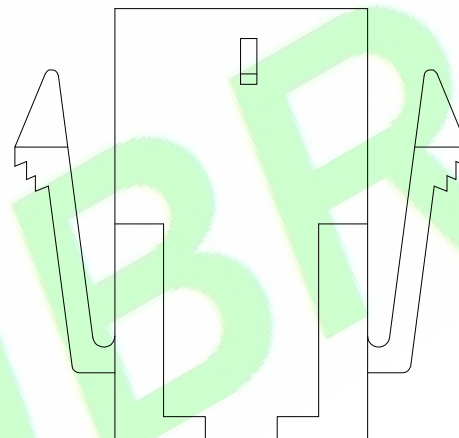


01: A Type

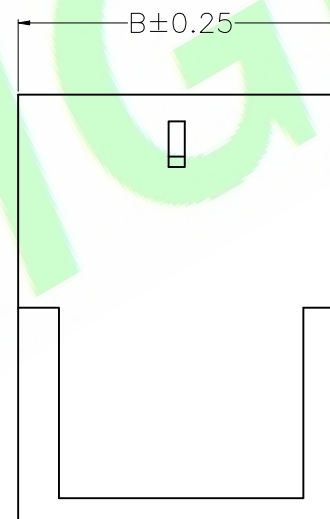

02: B Type

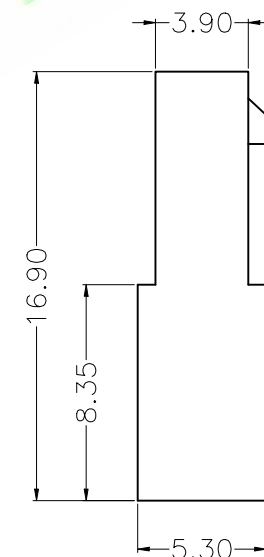

5X				DR.BY.: PIP	GENERAL TOLERANCE:		PART NO : H3001F-XXP-XX-XXA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±1.0°	TITLE : 3.00mm Female Housing	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Adding code options	Judyyan	20240131		X.X: ±0.20	X.XX:	DATE: 18-Dec-2017	SCALE: 1:1	
1X	ORIGINAL	PIP			X.XXX: ±0.10	X.XXX':		UNIT: mm	
REV.	DESCRIPTION	DR.BY	EDN. NO.						

A4