

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature

Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Ordering Information

H3003-XXP-01-A
1 2 3






1:— Series No.

2:— No. of Positions


3:— A:In Bag
B:In Tube
C:In Tray
G:Tape&Reel

RoHS Compliant

Automobile
Product

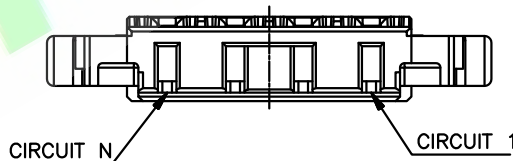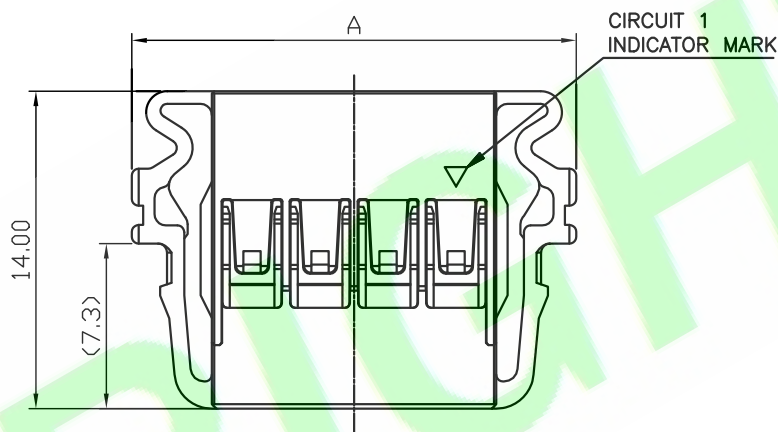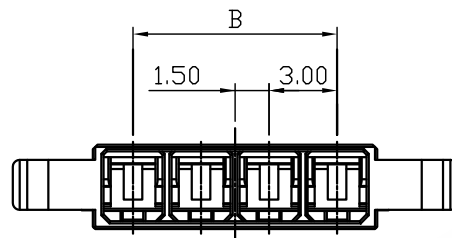

No. of Positions	A	B
2	13.6	3
3	16.6	6
4	19.6	9
5	22.6	12
6	25.6	15

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H3003-XXP-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				CHKD.: Hu.CH	LINEAR	ANGLES	DWG. NO.:				
3X					x.: x.x: ±0.20	x': ±5.0° x.x': ±3.0°	TITLE : PICO-LOCK3.0 RECEPTACLE HOUSING		SHEET: 1/1		A4
2X				x.xx: ±0.20	x.xx': ±2.0°	SCALE: 1:1					
1X	ORIGINAL	Zolin		APPD.: Billy	x.xxx: ±0.20	x.xxx': ±1.0°	DATE: 26-Dec-2024	UNIT: mm	THIRD ANGLE PROJECTION		
REV	DESCRIPTION	DR.BY	ECN. NO.								
	1	2	3	4	5	6	7	8	9		