

RoHS Compliant






Material:
Terminal: Copper Alloy
Wire Range: See Order Information
Insulation O.D.: See Order Information


Ordering Information

H3003TF-PX-XX

- 1: — Series No.
2: — T: Terminal
3: — H: Gold Flash on contact; Tin on tail
T: Tin Plated
4: — 01: A Type
02: B Type

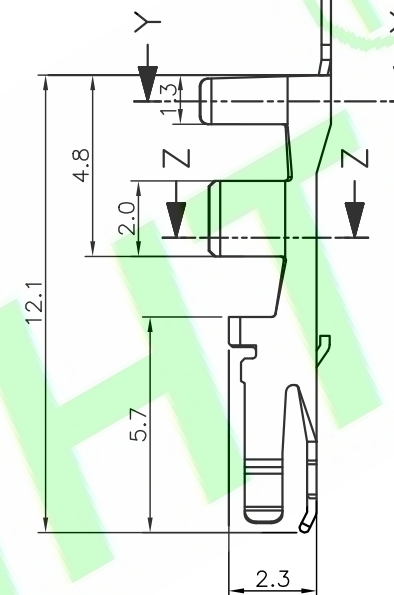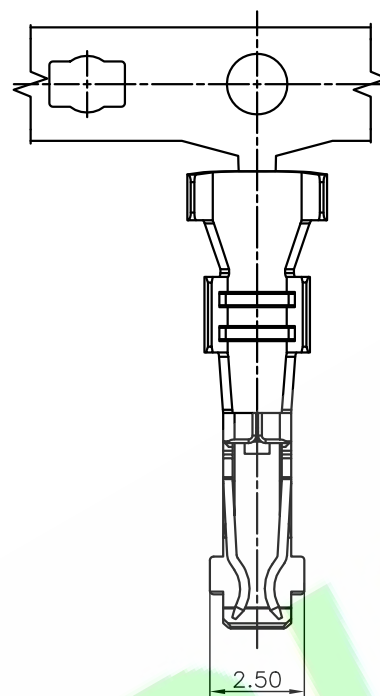

SECTION Z-Z



SECTION Y-Y

3.36	3.48	2.57	2.34	$\varnothing 1.76 \sim 2.2$	AWG #18-20	B
3.47	3.70	2.85	2.79	$\varnothing 2.0 \sim 2.5$	AWG #16-18	A
D	C	B	A	INS RANGE	WIRE RANGE	Type

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H3003TF-PX-XX
4X				CHKD.: Hu.CH	LINEAR	ANGLES	DWG. NO.:
3X				APPD.: Billy	X.: ± 0.20	X': $\pm 1.0'$	TITLE :
2X	ORIGINAL	Zolin			X.X: ± 0.20	X.X': ± 0.5	PICO-LOCK3.0 RECEPTACLE TERMINAL
1X	DESCRIPTION	DR.BY	ECN. NO		X.XX: ± 0.20	X.XX':	DATE: 26-Dec-2024
REV					X.XXX: ± 0.20	X.XXX':	

HJBRIGHT[®] 東莞市華晶電子有限公司			A4
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
SHEET: 1/1	SCALE: 1:1		
UNIT: mm	THIRD ANGLE PROJECTION		