

Specifications:

Material And Finish:

Insulator:PA6

Cap:PBT

Ring Seal:Inherently lubricated Silicone

MAT Seal:Inherently lubricated Silicone

Rating:

Current Rating:22.0 Amp

Voltage Rating:14V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

H35000F-12P-XX-XXA

1 2 3 4 5 6 7

1:— Series No.

2:— F:Female

3:— No. of Positions

4:— 01:Hoybrid W/Extended-Clipslot

02:Hoybrid Non-Clipslot

5:— A:A Type Black

B:B Type Light Gray

C:C Type Dark Gray





D:D Type Stone Gray

E:A Type Yellow





6:— A:Without Cpa

B:With Cpa




7:— A:In Bag



Hoybrid W/Extended-Clipslot

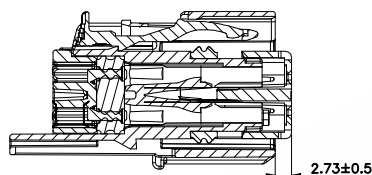Primary Lock Reinforcement(PLR)
Shown in Pre-Staged Position
Section A-A

Hoybrid Non-Clipslot

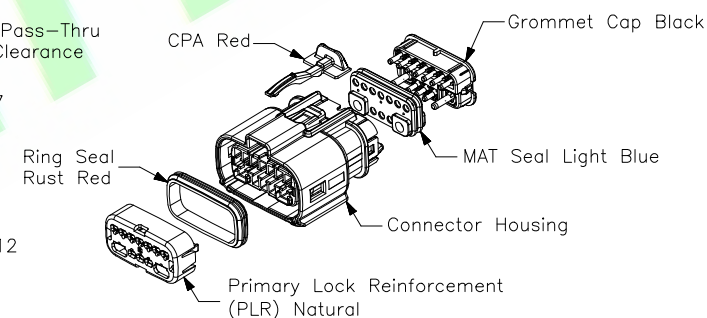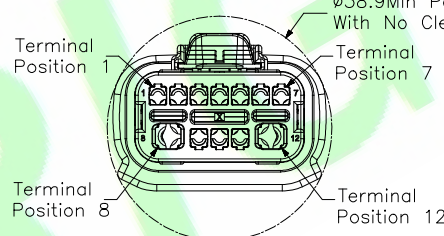Primary Lock Reinforcement(PLR)
Shown In Final-Staged Position
Section B-B

A Type Black	B Type Light Gray	C Type Dark Gray	D Type Stone Gray	E A Type Yellow

DR.BY:
JudyyanCHKD.:
Hu.chAPPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X.: ±5.0°	X.X: ±3.0°
X.X: ±0.30	X.XX: ±2.0°
X.XX: ±0.20	X.XXX: ±1.0°
X.XXX: ±0.10	

PART NO : H35000F-12P-XX-XXA

DWG. NO.:

TITLE :

MX150 Rcpt Dual Row Sealed
Assembly Mat Seal Female 12P


DATE: 27-Sep-2022

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2

SCALE: 1:1

UNIT: mm




THIRD ANGLE PROJECTION


A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


RoHS Compliant




A Type






B Type




C Type




D Type

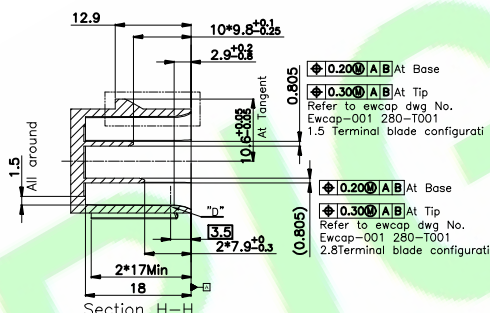




Section H-H

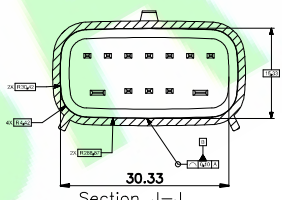

Section J-J

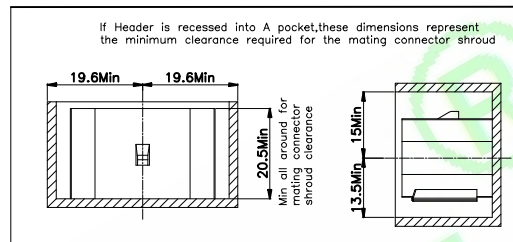

Packaging frame

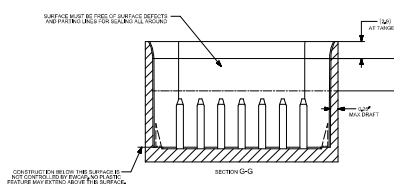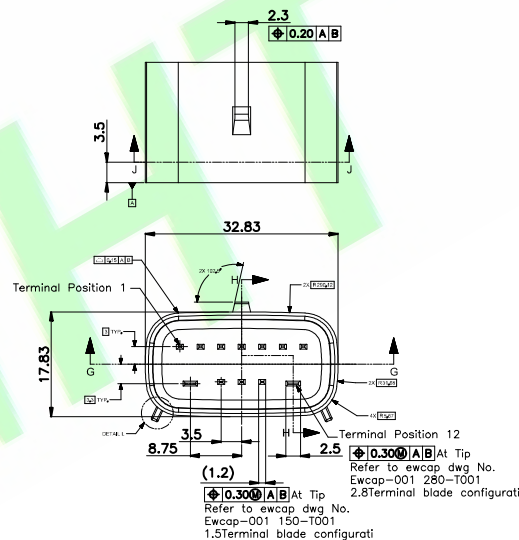

D	STONE GRAY
C	DARK GRAY
B	LIGHT GRAY
A	BLACK
OPTION	MATING CONNECTOR COLOR

12P Hybrid Interface definition

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H35000F-12P-XX-XXA
CHKD.: Hu.ch	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : MX150 Rcpt Dual Row Sealed Assembly Mat Seal Female 12P
	X.X: ±0.20	X.X': ±3.0°	DATE: 27-Sep-2022
	X.XX: ±0.10	X.XX': ±2.0°	
	X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2	THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.