

Specifications:
Material And Finish:
Contact:Copper alloy

Rating:

Current Rating:22Amp(16AWG)
Voltage Rating:14V AC/DC
Operating Temperature Range:-40°~+125°C


Electrical:

Contact resistance: 8m Ohm Max
Wire Gauge: #16~20AWG

Ordering Information
H35000TM-PX

$$\overline{1} \quad \overline{23} \quad \overline{4}$$

- 1: — Series No.
2: — T:Terminal
3: — M:Male
4: — A:Gold Flash
Q: Tin Plated

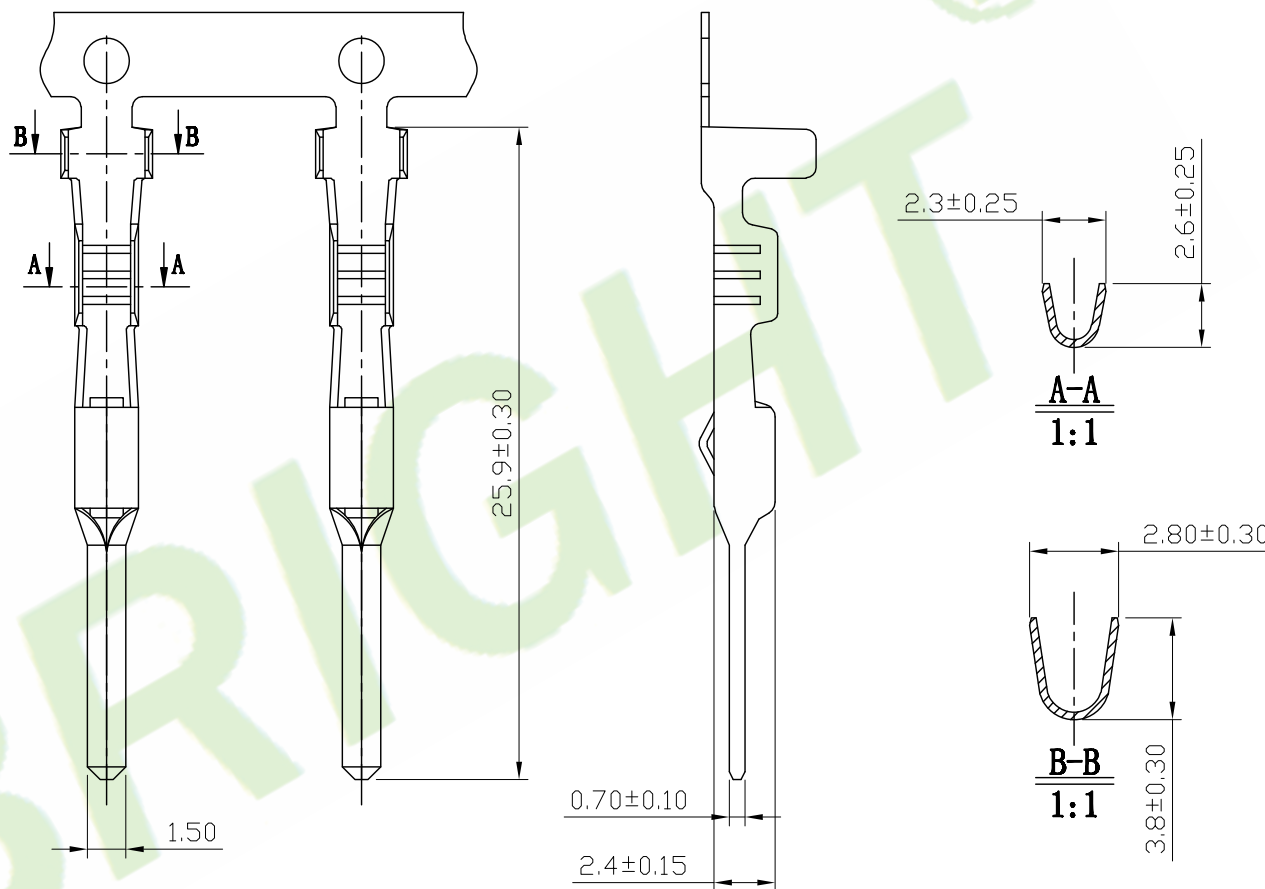

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H35000TM-PX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: Aren	x.:	x': ±5.0°	TITLE : MX150 Rcpt 3.5 Pitch Terminal Male		SHEET: 1/3			A4
2X					x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 14-Nov-2022		UNIT: mm			
REV	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°						