

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:1.0 Amp

Voltage Rating:1400V AC/DC





Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:3800V AC/Minute

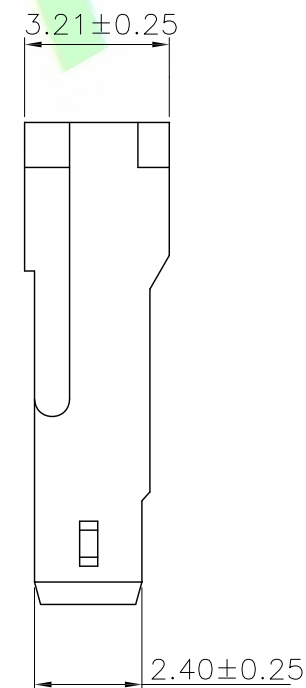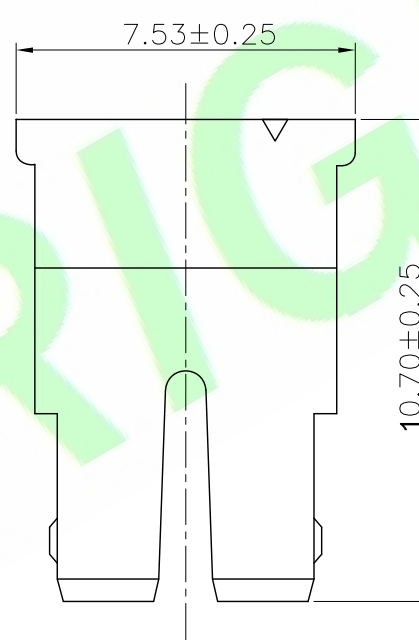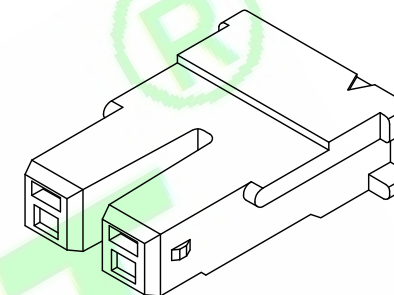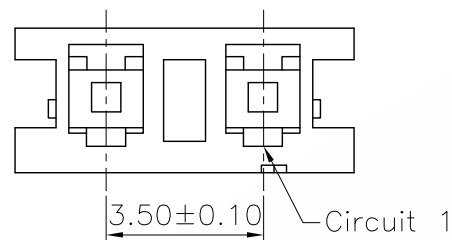


Ordering Information

H3500M-XXP-01-X

1 2 3 4

- 1: Series No.
2: M: Male
3: No. of Positions
4: A: In Bag
C: In Tray

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO :H3500M-XXP-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4					
4X					LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.: Aren	X.: ±0.35	X': ±1.0°	TITLE : 3.5mm Series Male connector						
2X				APPD.: Billy	X.X: ±0.25	X.XX':							
1X	ORIGINAL	Tsw			X.XX: ±0.10	X.XX':	DATE: 30-Aug-2021						
REV.	DESCRIPTION	DR.BY	EDN. NO.		X.XXX: ±0.10	X.XXX':							