

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:1.0 Amp

Voltage Rating:1400V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:3800V AC/Minute

Ordering Information

H3500M-XXP-02-X

1 2 3 4





1: Series No.


2: M: Male

3: No. of Positions

4: A:In Bag

C:In Tray

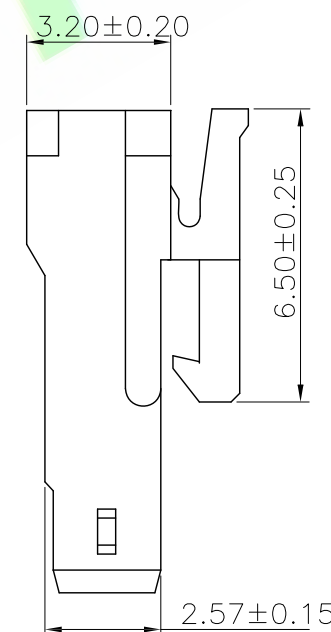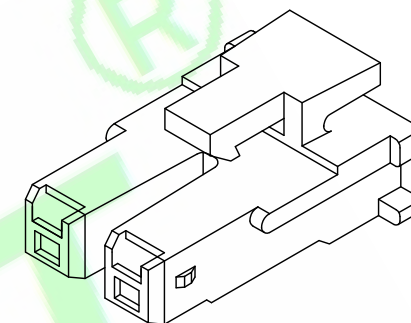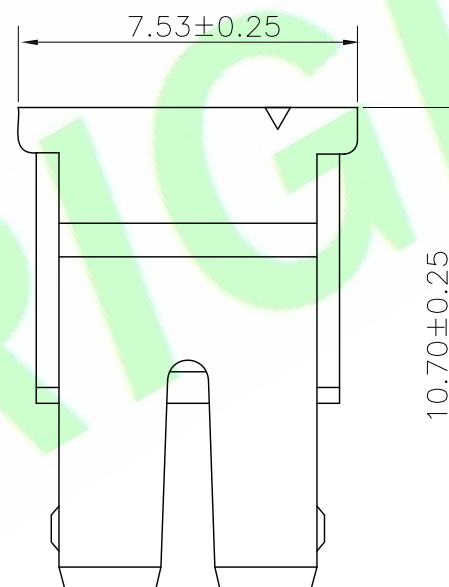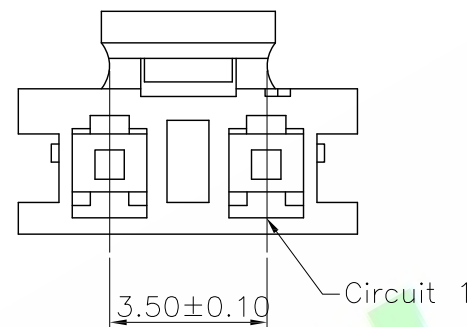

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO :H3500M-XXP-02-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X					LINEAR	ANGLES						DWG. NO.:			
3X				CHKD.: Aren	X.: X.X: ±0.35	X': ±1.0° X.X':	TITLE : 3.5mm Series Male connector								
2X					X.XX: ±0.25	X.XX':									
1X	ORIGINAL	Tsw		APPD.: Billy	X.XXX: ±0.10	X.XXX':	DATE: 30-Aug-2021	SHEET: 1/1		A4					
REV.	DESCRIPTION	DR.BY	EDN. NO.				UNIT: mm	THIRD ANGLE PROJECTION							
1		2		3		4		5		6		7		8	