

RoHS Compliant







Specifications:
Material And Finish:
Insulator:PA66

Rating:
Current Rating:10.0 Amp
Voltage Rating:12V AC/DC
Operating Temperature Range:-40°~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1800V AC/Minute

Ordering Information
H35012F-14P-01-NA
1 2 3 4 5

- 1: — Series No.
2: — F:Female Housing
3: — No. of Positions
4: — N:Natural
5: — A:In Bag

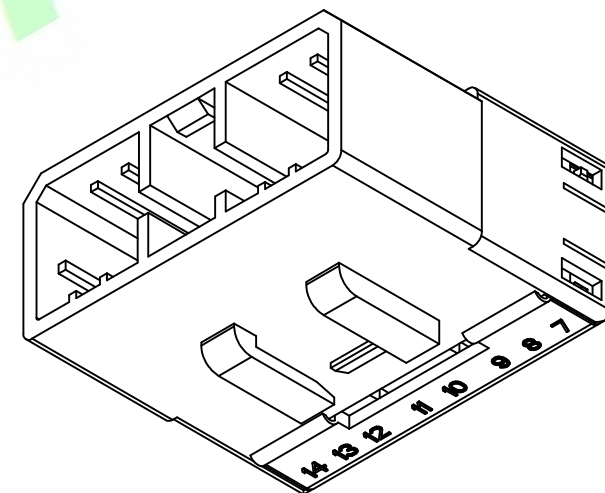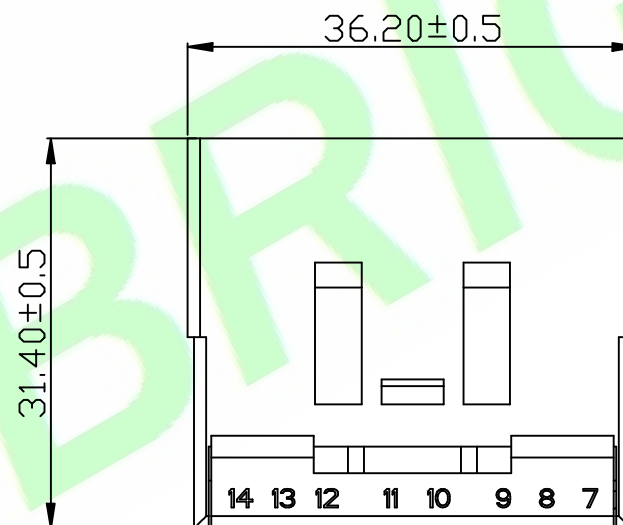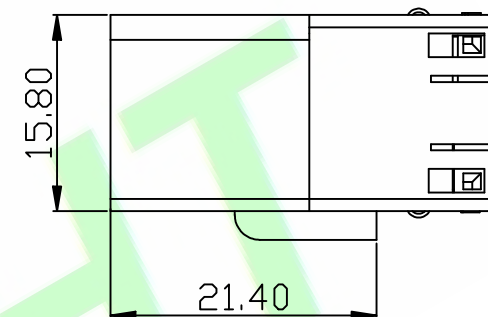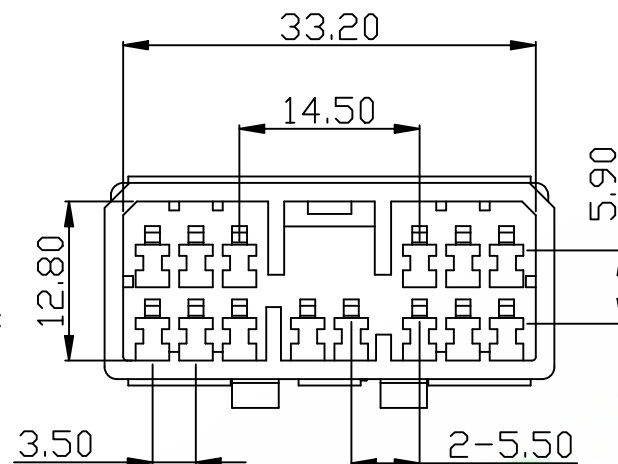

DR.BY.: Tony.Zou	GENERAL TOLERANCE:		PART NO : H35012F-14P-01-NA		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
	LINEAR	ANGLES					
CHKD.: Hu.Ch	X: ±0.35	X°: ±3.0°	TITLE : H35012 Series 14P Pulg Female Housing				
	X.X: ±2.0	X.X°: ±2.0°					
APPD.: Billy	X.XX: ±1.0	X.XX°: ±1.0°					
	X.XXX: ±0.5	X.XXX°: ±0.5°	DATE: 28-Jun-2021				

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

1X	ORIGINAL	Tony.Zou	ECN. NO.
REV.	DESCRIPTION	DR.BY	