

Specifications:**Material And Finish:**

Insulator:PA66

Rating:

Current Rating:10.0 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40~+125°C

Electrical:

Contact resistance:10m Ohm Max





Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

Ordering Information**H35012F-20P-01-NX**

1 2 3 4 5

- 1: — Series No.
2: — Female Housing
3: — No. of Positions
4: — N:Natural
5: — A:In Bag
C:In Tray

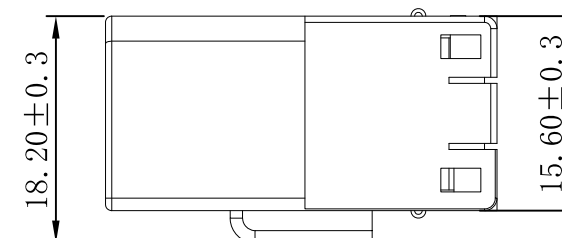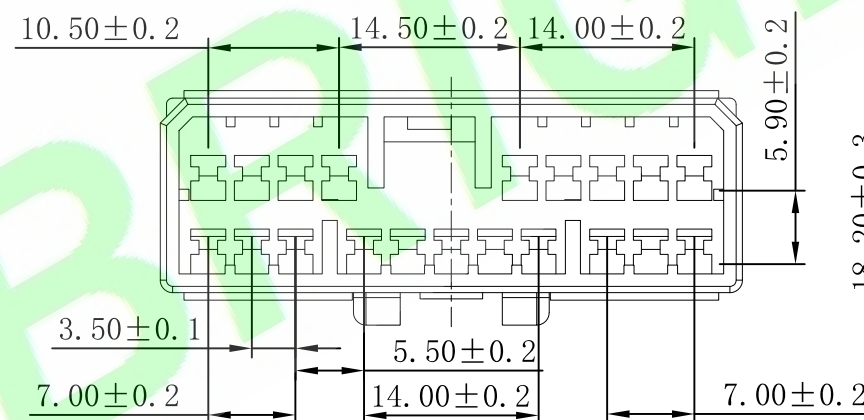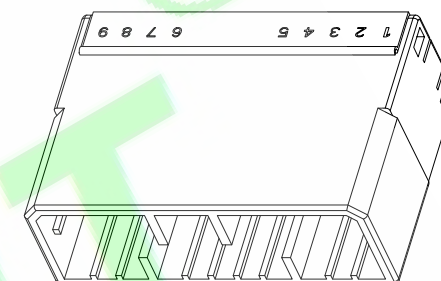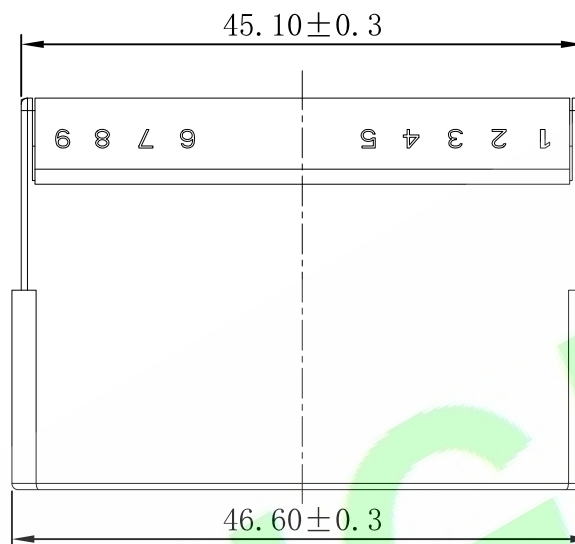


1X	ORIGINAL	Tony.Zou	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY: Tony.Zou	GENERAL TOLERANCE:		PART NO : H35012F-20P-01-NX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Hu.Ch	X: ±0.35	X°: ±3.0°	TITLE : H35012 Series 20P Pulg Female Housing	
	X.X: ±2.0	X.X°: ±2.0°		
APPD.: Billy	X.XX: ±1.0	X.XX°: ±1.0°	DATE: 28-Jun-2023	
	X.XXX: ±0.5	X.XXX°: ±0.5°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4