

Specifications:

Material:

Insulator: PA66 UL94V-0

Rating:

Current Rating: 10.0 Amp

Voltage Rating: 12V AC/DC



Operating Temperature Range: $-30^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1800V AC/Minute

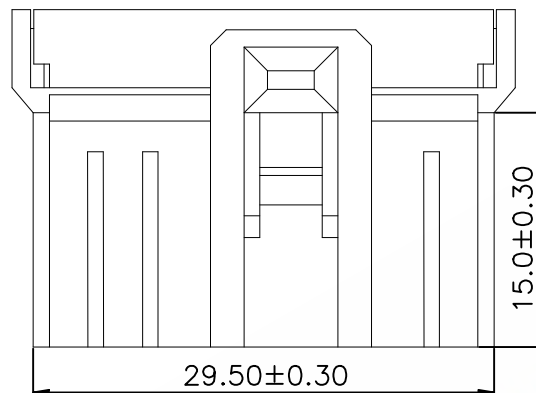

Ordering Information

H35012M-12P-01-NA

1 2 3 4 5


1: — Series No.

2: — M: Male Housing

3: — No. of Positions

4: — N: Natural

5: — A: In Bag

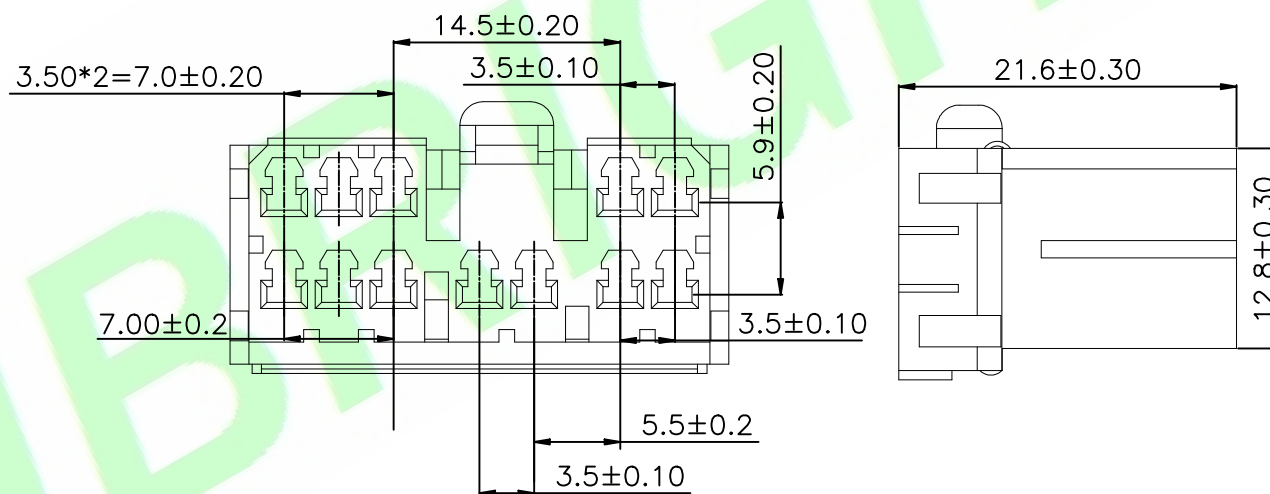

2X	Update code options	Judyyan	20240918
2X	Update code options	Judyyan	20220725
1X	ORIGINAL	Tsw	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : H35012M-12P-01-NA	
CHKD.: Mark	LINEAR	ANGLES	DWG. NO.:	
	X.: ±0.30	X': ±3.0°	TITLE : H35012 Series Male Housing	
	X.X: ±0.20	X.X': ±1.0°		
	X.XX: ±0.10	X.XX': ±0.5°		
APPD.: Billy	X.XXX: ±0.10	X.XXX': ±	DATE: 30-Aug-2021	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4