

RoHS Compliant



Specifications:

Material:

Insulator:PA66 UL94V-0

Rating:

Current Rating:10.0 Amp

Voltage Rating:12V AC/DC



Operating Temperature Range:-30°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

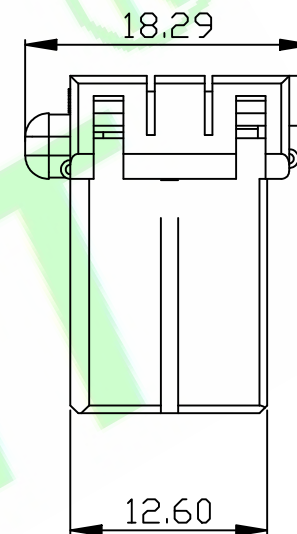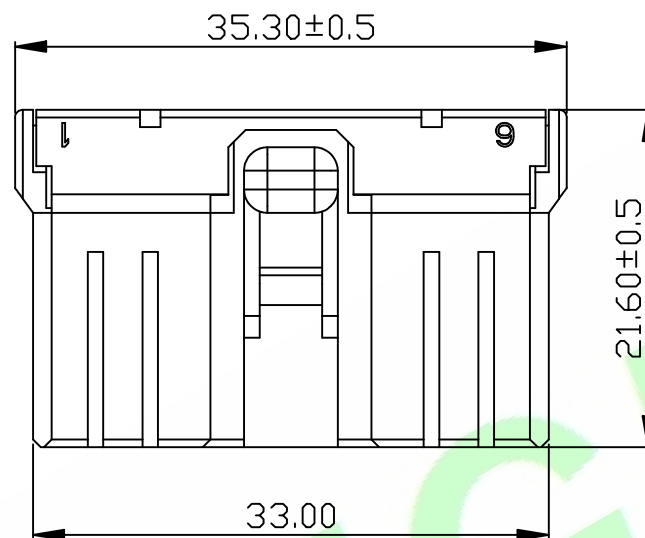

Ordering Information

H35012M-14P-01-NA

1 2 3 45



1:—Series No.

2:—M:Male

3:—No. of Positions

4:—N:Natural

5:—A:In Bag

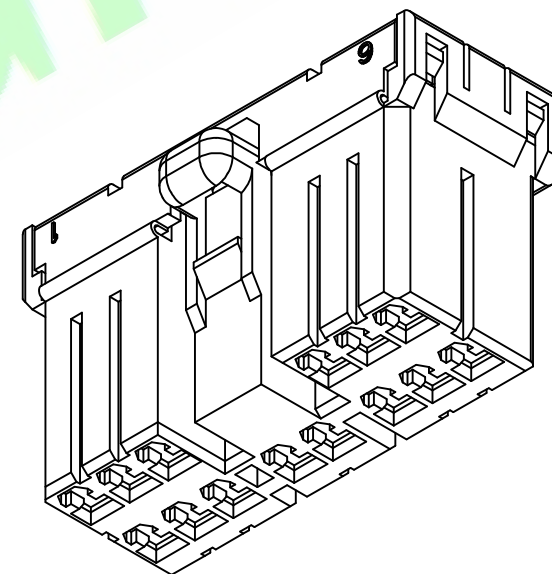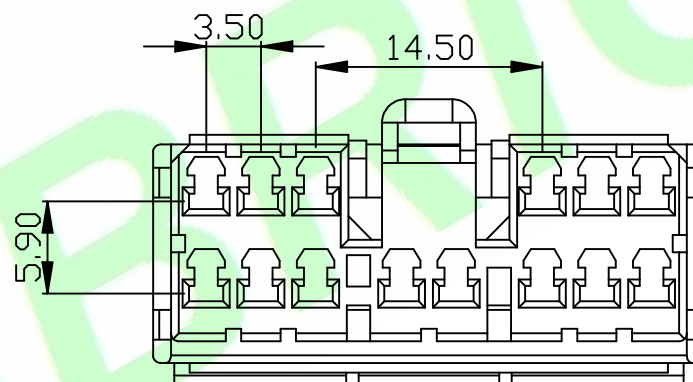


DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H35012M-14P-01-NA
	LINEAR	ANGLES	
CHKD.: Hu.ch	X.: ±0.30	X': ±3.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±1.0°	
APPD.: Billy	X.XX: ±0.10	X.XX': ±0.5°	TITLE : H35012 Series Female Housing
	X.XXX: ±0.10	X.XXX': ±	
DATE: 30-Aug-2021			

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.