RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA66

Rating:
Current Rating:10.0 Amp
Voltage Rating:12V AC/DC
Operating Temperature Range:−40°~+125°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:1800V AC/Minute

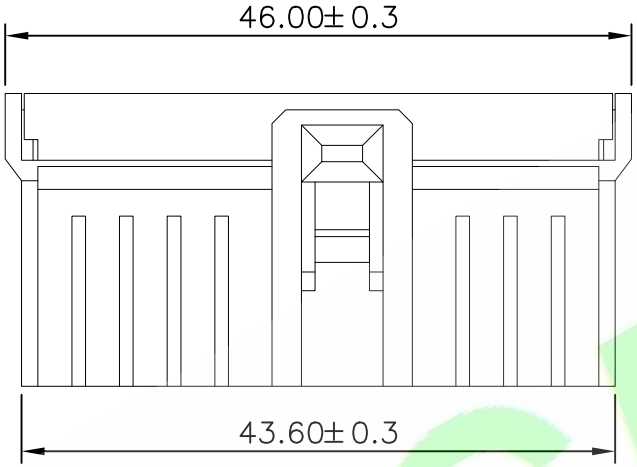

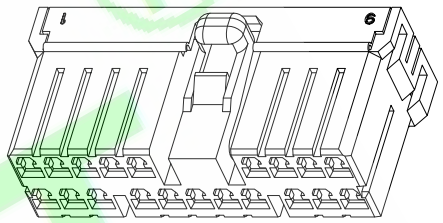

Ordering Information
H35012M−20P−01−NX
1 2 3 45

1: —— Series No.
2: —— M:Male Housing
3: —— No. of Positions
4: —— N:Natural
5: —— A:In Bag
C:In Tray

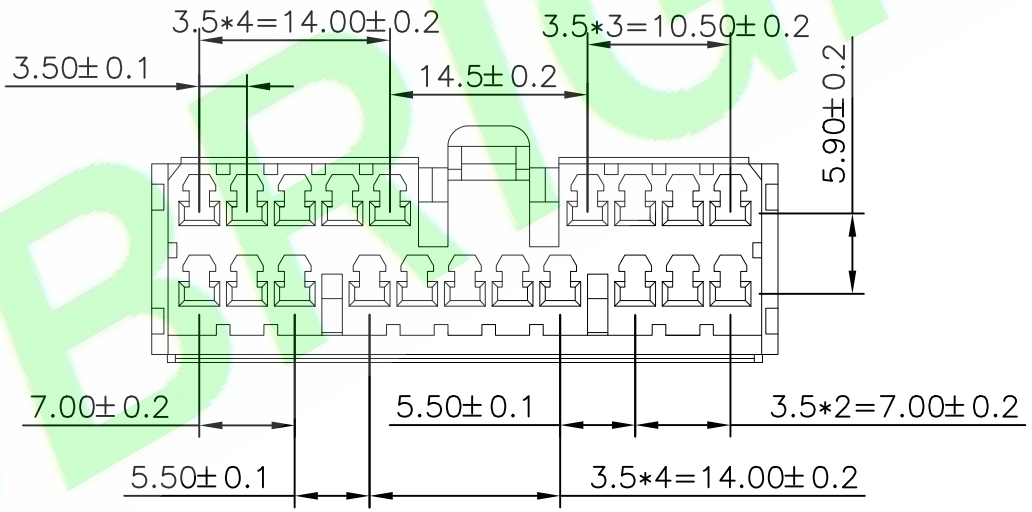

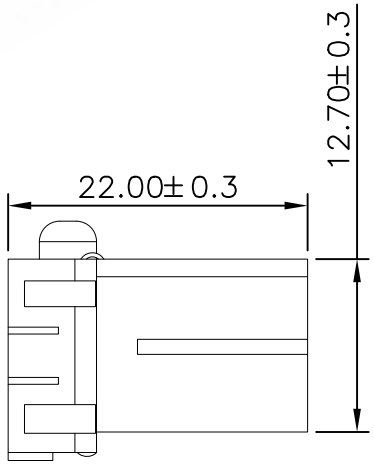

1X	ORIGINAL	Tony.Zou	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Tony.Zou
CHKD.: Hu.Ch
APPD.: Billy

GENERAL TOLERANCE:			
LINEAR		ANGLES	
X.:	±0.35	X°:	±3.0°
X.X:	±0.3	X.X°:	±2.0°
X.XX:	±0.25	X.XX°:	±1.0°
X.XXX:	±0.2	X.XXX°:	±0.5°

PART NO : H35012M−20P−01−NX
DWG. NO.:
TITLE : H35012 Series Male Housing
DATE: 24−Jun−2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT−E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

HJBRIGHT®