

RoHS Compliant

Specifications:

Material:

Insulator: PA66 UL94V-0 Color: Black

Rating:

Current Rating: 3.0Amp(20AWG)

Voltage Rating: 12V~250V AC/DC





Operating Temperature Range: -40~+125°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 100M ohm min.

Withstanding Voltage: 1000V AC/Minute

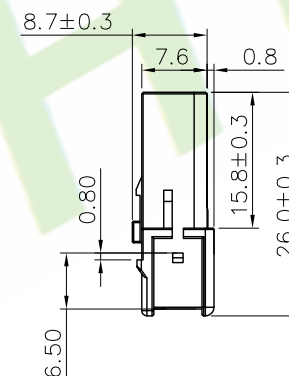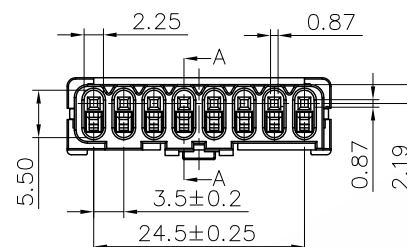


Ordering Information

H3503F-XXP-01-A

1 2 3 4

- 1: — Series No.
- 2: — F: Female Housing
- 3: — No. of Positions
- 4: — A: In Bag



Circuits	Dimension mm		
	A	B	C
02	3.5	8.0	9.7
04	10.5	15.0	16.7
06	17.5	22.0	23.7
08	24.5	29.0	30.7

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H3503F-XXP-01-A	HJBRIGHT® 东莞市华晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Tony	X.: ±	X': ±5.0°	TITLE :	SHEET: 1/1	THIRD ANGLE PROJECTION
2X	Update code option	Judyann	20221223		X.X: ±0.15	X.X': ±3.0°	PH3.5mm Female HOUSING	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.10	X.XX': ±2.0°	DATE: 7-Jun-2017	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.05	X.XXX': ±1.0°			A4