

Specifications:**Material And Finish:**

Insulator:Nylon UL94V-0

Rating:

Current Rating:14 Amp(16AWG)

Voltage Rating:400V AC/DC




Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1800V AC/Minute

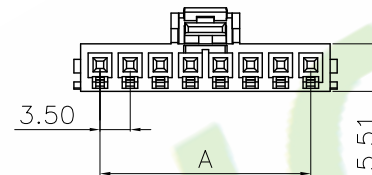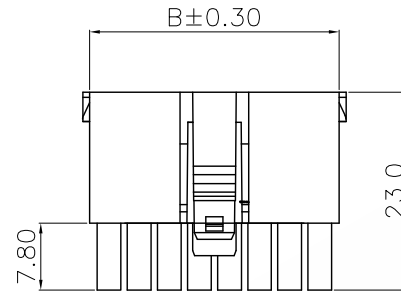

No.	Dimension mm	
	A	B
2	3.50	8.00
3	7.00	11.50
4	10.50	15.00
5	14.00	18.50
6	17.50	22.00
7	21.00	25.50
8	24.50	29.00
12	38.50	43.00

Ordering Information**H3506-XXP-XX-XA**

1 2 3 4 5

1: — Series No.

2: — No. of Positions

3: — 01: A Type Black


02: B Type Natural

4: — S: Standard Type


T: TPA Type

5: — A:In Bag

A Type Black




Standard, A KEY




TPA Type, A KEY

B Type Natural



Standard, B KEY



TPA Type, B KEY

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judy्यान	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:

Judy्यान

CHKD.:

Aren

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR

X.:

X.X: ±0.40

X.XX: ±0.25

X.XXX: ±0.15

ANGLES

X': ±5.0°

X.X': ±3.0°

X.XX': ±2.0°

X.XXX': ±1.0°

PART NO : H3506-XXP-XX-XA

DWG. NO.:

TITLE :

3.5mm Pitch Single Row Housing

DATE: 11-Jul-2021


HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4