

Specifications:**Material And Finish:**

Insulator:Nylon UL94V-0

Rating:

Current Rating:14Amp(16AWG)

Voltage Rating:400V AC/DC





Operating Temperature Range:-40°C~+105°C

Electrical:


Contact resistance:5m Ohm Max

Insulator resistance:1000M ohm min.


Withstanding Voltage:1800V AC/Minute

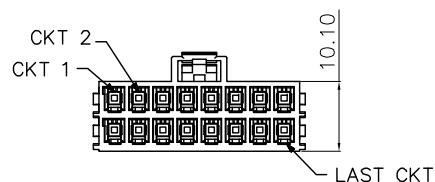


4CKT




6CKT




8CKT




12CKT



10CKT



14CKT




16CKT

Ordering Information**H35060-XXP-XX-XA**

1 2 3 4 5

- 1: — Series No.
2: — No. of Positions
3: — 01: A Type Black
02: B Type Natural
4: — S: Standard Type
T: TPA Type
5: — A:In Bag

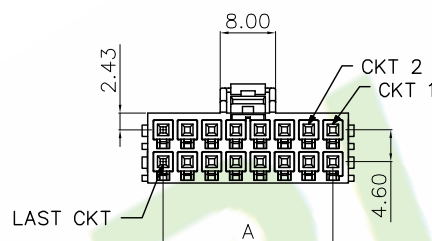


No.	Dimension mm	
	A	B
4	3.50	8.00
6	7.00	11.50
8	10.50	15.00
10	14.00	18.50
12	17.50	22.00
14	21.00	25.50
16	24.50	29.00


A Type Black

B Type Natural

KEYING OPTION A


LAST CIRCUIT-
Standard, A KEY

FIRST CIRCUIT



TPA Type, A KEY


KEYING OPTION B



FIRST CIRCUIT

Standard, B KEY

LAST CIRCUIT



TPA Type, B KEY

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:

Judyyan

CHKD.:

Aren

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR		ANGLES	
X:		X':	±5.0°
X.X:	±0.40	X.X':	±3.0°
X.XX:	±0.25	X.XX':	±2.0°
X.XXX:	±0.15	X.XXX':	±1.0°

PART NO : H35060-XXP-XX-XA

DWG. NO.:

TITLE :

3.5mm Pitch Double Row Housing

DATE: 11-Jul-2021

HJBRIGHT® 东莞市华晶电子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4