

Specifications:

Material And Finish:

Contact: Copper alloy

Rating:

Current Rating: 14 Amp (16AWG)

Voltage Rating: 400V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 5m Ohm Max

Insulator resistance: 1000M Ohm min.

Withstanding Voltage: 1800V AC/Minute

Wire Range: AWG#16~#22

Ordering Information

H3506T-PX-XX

1 2 3 4


1: Series No.

2: T: Terminal

3: Q: Tin Plated

4: 01: #16~#18 AWG

02: #20~#22 AWG

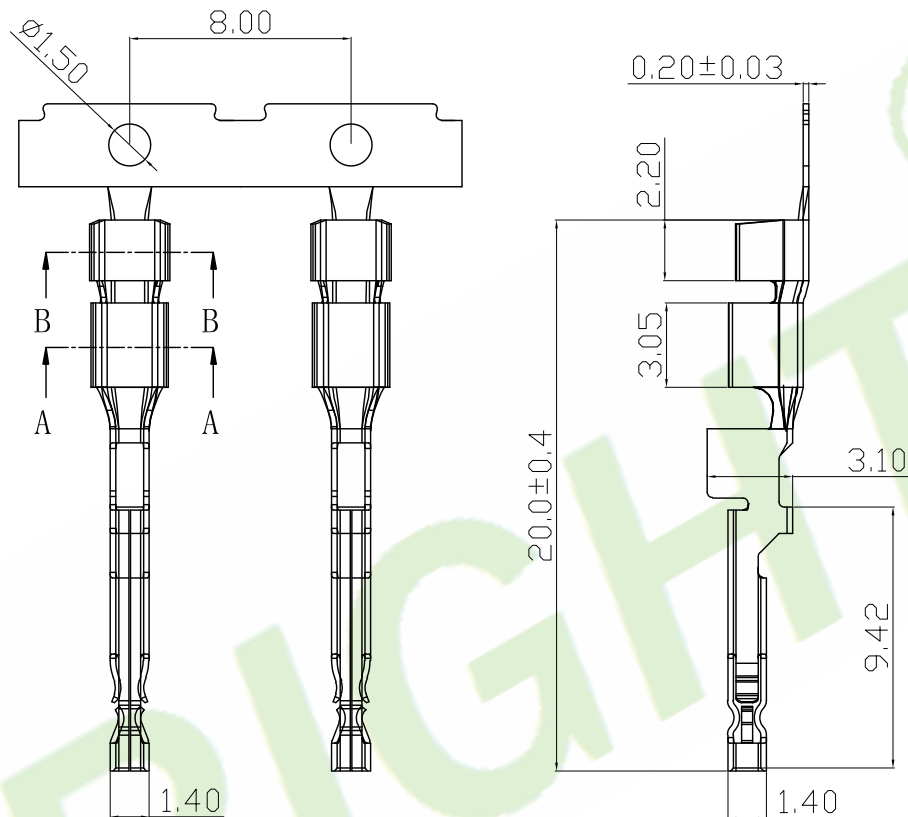

剖面A-A

剖面B-B

	Wire range	A	B	C	D
01	#20~#22	2.20	2.20	2.10	2.33
02	#16~#18	2.80	2.80	2.63	2.90

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Judyyan
CHKD:	Aren
APPD:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.40	X': ±5.0°
X.X: ±0.30	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : H3506T-PX-XX
DWG. NO.:
TITLE : 3.5mm Pitch Dynamic Terminal
DATE: 30-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4