

Specifications:

Material:

Insulator:PBT UL94V-0

Rating:

Current Rating:10.0Amp

Voltage Rating:14V AC/DC

Operating Temperature Range:-40°~ +85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Dielectric Strength:1000V AC at 50 Hz
or 60 Hz/1600V DC

Ordering Information

H3509M-02P-XX-A

1 2 3 4 5








1: — Series No.

2: — M:Male

3: — No. of position

4: — 01:Type A Black
02:Type B Natural

5: — A:In Bag

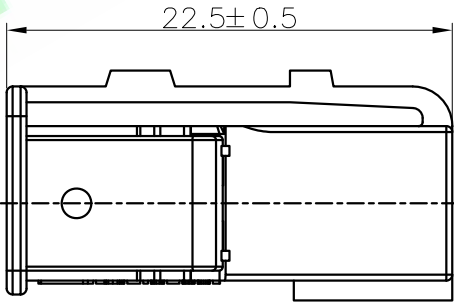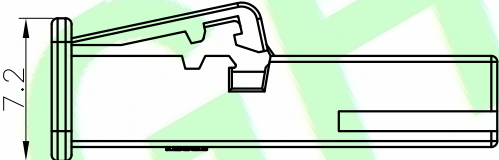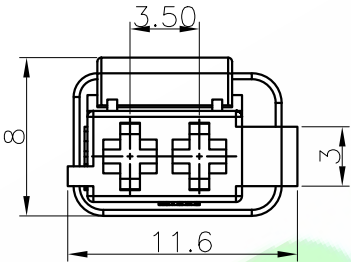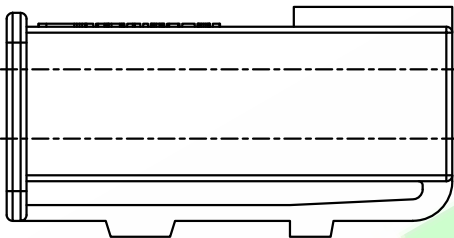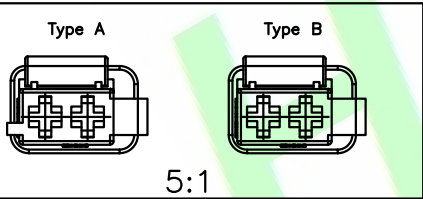

DR.BY.: Annie	GENERAL TOLERANCE:		PART NO : H3509M-02P-XX-A	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ±0.30	x': ±3.0°	TITLE :	
	x.xx: ±0.20	x.x': ±1.0°	H3509 Series Male Housing	
APPD.: Billy	x.xx: ±0.20	x.xx': ±0.5°	DATE: 11-Dec-2024	
	x.xxx: ±0.10	x.xxx': ±		

HJBRIGHT® 東莞市華晶電子有限公司

BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Annie	
REV.	DESCRIPTION	DR.BY	EDL. NO.