

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:White

Rating:

Current Rating:7.0 AmpAC/DC(18AWG)

Voltage Rating:250V AC/DC



Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

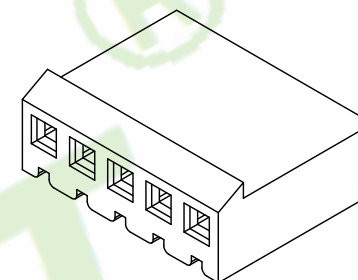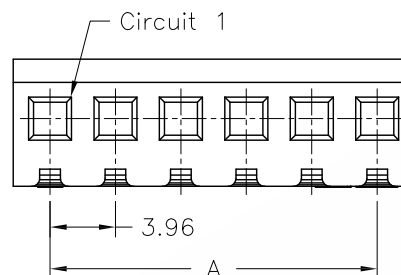

Dimensions:

Circuit No.	Dimensions	
	A	B
02	3.96	8.43
03	7.92	12.39
04	11.88	16.35
05	15.84	20.31
06	19.80	24.27
07	23.76	28.23
08	27.72	32.19
09	31.68	36.15
10	35.64	40.11
11	39.60	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.40	63.87
17	63.36	67.83
18	67.32	71.79
19	71.28	75.75
20	75.24	79.71

Ordering Information

H3960-XXP-XXA

1 2 3 4


1: Series No.

2: No. of Positions

3: 01:A Type

02:B Type

4: A:In Bag

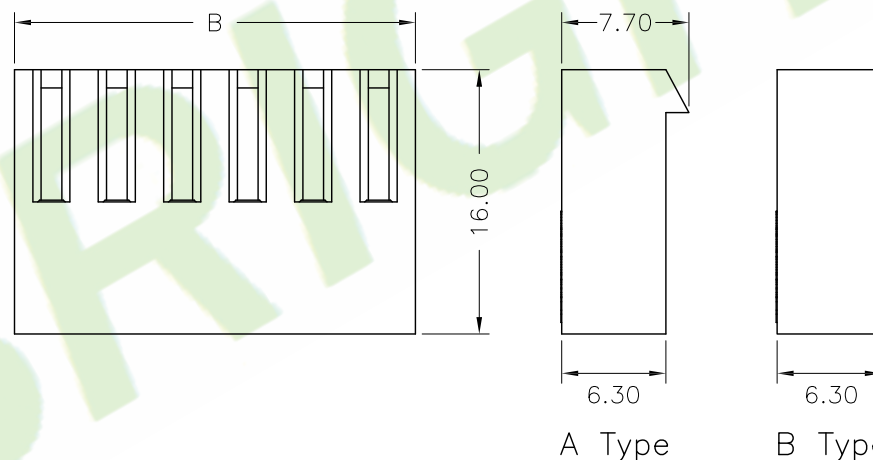

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO :H3960-XXP-XXA
4X					LINEAR	ANGLES	
3X				CHKD.: Tony	X.: ±0.30	X': ±1.0°	DWG. NO.:
2X					X.X: ±0.20	X.X':	TITLE :
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.10	X.XX':	3.96mm Series connectors
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX':	DATE: 21-Jun-2015

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4