


Specifications:
Material And Finish:
Insulator:Nylon 66

Rating:

Current Rating:7.0 Amp(18AWG)
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+105°C


Electrical:

Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

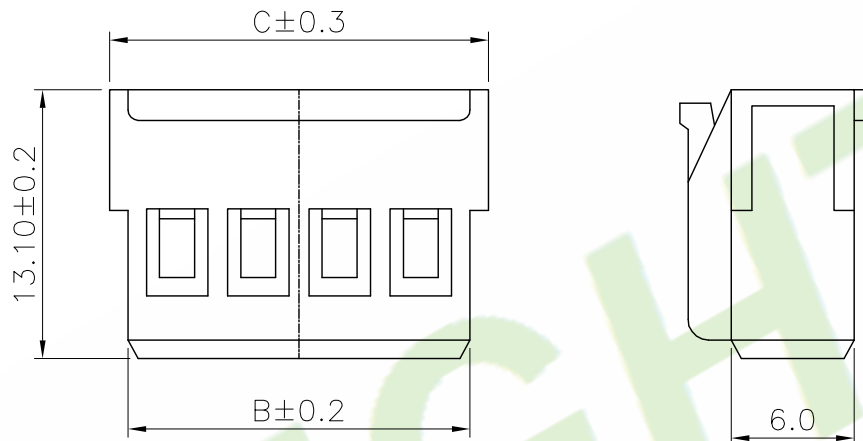**Ordering Information****H3969-XXP-01-XA**

1 2 3 4

- 1:— Series No.
2:— No. of Positions
3:— B:Black
W:White
4:— A:In Bag

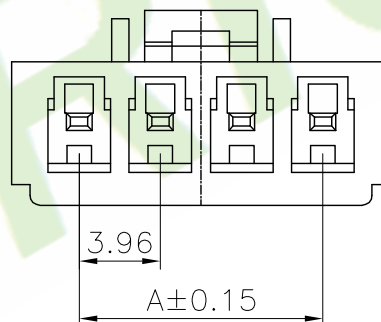

PIN	A	B	C
2	3.96	8.84	10.54
3	7.92	12.80	14.50
4	11.88	16.76	18.64
5	15.84	20.72	22.42
6	19.80	24.68	26.38
7	23.76	28.64	30.34
8	27.72	32.60	34.30
9	31.68	36.56	38.26
10	35.64	40.52	42.22
11	39.60	44.48	46.18
12	43.56	48.44	50.14
13	47.52	52.40	54.10
14	51.48	56.36	58.06
15	55.44	60.32	62.02
16	59.40	64.28	65.98
17	63.36	68.24	69.94
18	67.32	72.20	73.90

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : H3969-XXP-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 3.96mm Pitch Housing Connector	SHEET: 1/1		A4
2X	Update code option	Judyyan	20221230		x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Kenry		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		DATE: 24-Jun-2015		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				