

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Plated:See Ordering Information

Rating:

Current Rating:10.0Amp(16AWG)

Voltage Rating:250V AC/DC

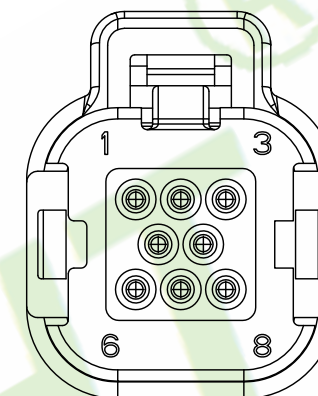
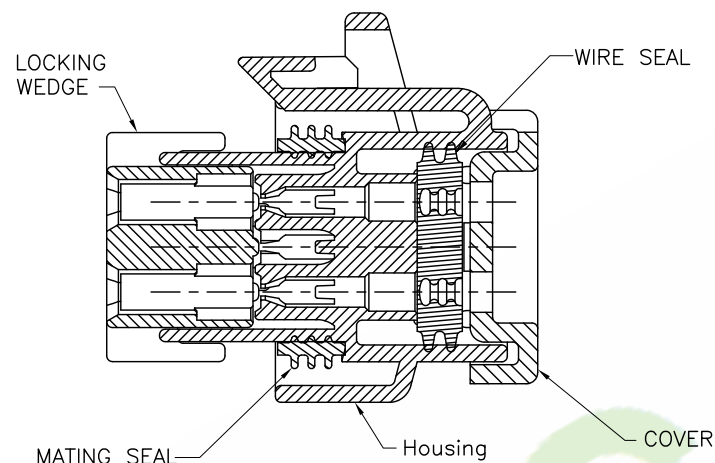
Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

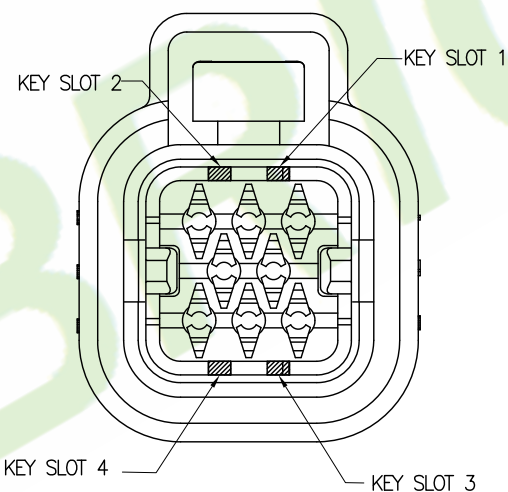
Withstanding Voltage:1000V AC/Minute

**Ordering Information**

H400005-08-XX-X

1 2 3 4

- 1:— Series No.
2:— No. of Positions
3:— See Table
4:— A:In bag
B:In Tube
C:In Tray



H400005-08-02-X	1 & 3
H400005-08-01-X	2 & 4
P/N	KEY SLOT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H400005-08-XX-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
4X					LINEAR	ANGLES					DWG. NO.:		
3X				CHKD.: Tony	x.: ±5.0°	x.x: ±0.35	TITLE : 8 POS SEAL PLUG ASS				SHEET: 1/1		A4
2X	Update code option	DENG	20230413		x.x: ±0.35	x.x: ±3.0°					SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.25	x.xx: ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION					
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx: ±1.0°	DATE: 10-Oct-2017						