

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Plated:See Ordering Information

Rating:

Current Rating:10.0Amp(16AWG)

Voltage Rating:250V AC/DC

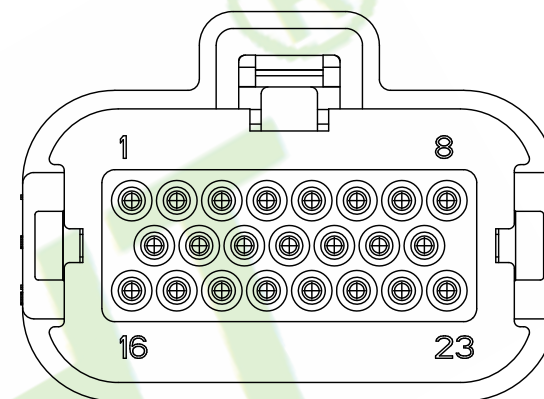
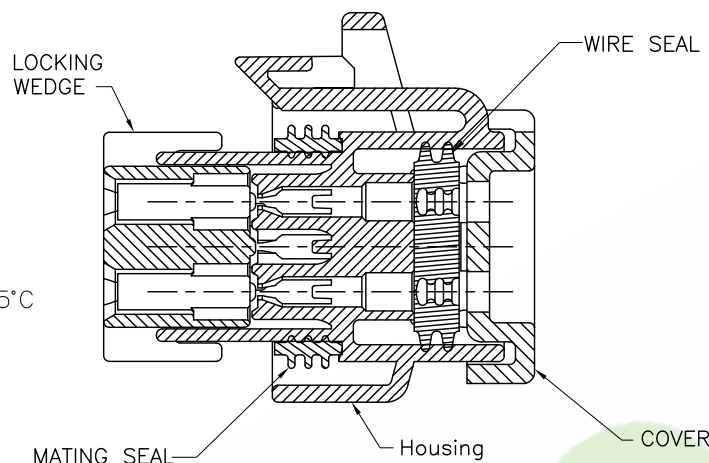
Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1000V AC/Minute

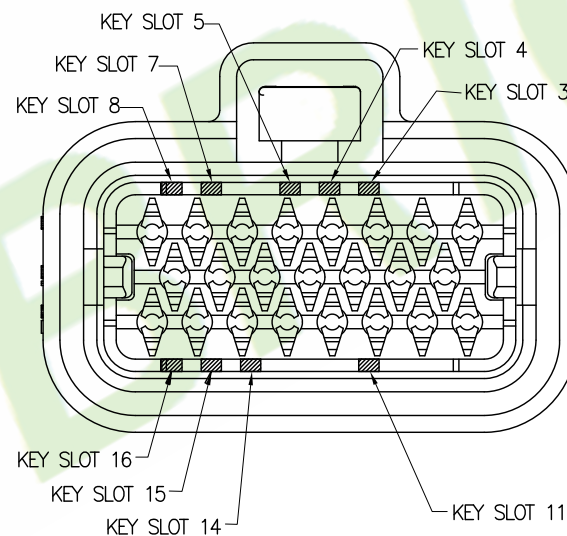
**Ordering Information****H400005-23-XX-X**

1	2	3	4
---	---	---	---


1:— Series No.

2:— No. of Positions

3:— See Table

4:— A:In bag
B:In Tube
C:In Tray

H400005-23-05-X	3,8 & 16
H400005-23-04-X	7 & 15
H400005-23-03-X	4 & 14
H400005-23-02-X	5 & 11
H400005-23-01-X	4 & 14
P/N	KEY SLOT

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H400005-23-XX-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: x.x: ±0.35	x': ±5.0° x.x': ±3.0°	TITLE : 23 POS SEAL PLUG ASS	SHEET: 1/1		A4
2X	Update code option	DENG	20230413	APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°		SCALE: 1:1		
1X	ORIGINAL	Samson			x.xxx: ±0.15	x.xxx': ±1.0°		DATE: 10-Oct-2017		
REV.	DESCRIPTION	DR.BY	ECN. NO.						THIRD ANGLE PROJECTION	