


RoHS Compliant

Specifications:
Material And Finish:
Insulator:PBT UL94V-0


Ordering Information
H400005-XXP-XX-X
1 2 3 4

- 1:—Series No.
2:—No. of Positions
3:—See Table
4:—A:In bag
B:In Tube
C:In Tray


Circuits	Dimension mm
08	27.40
14	35.40
23	47.40
35	63.40

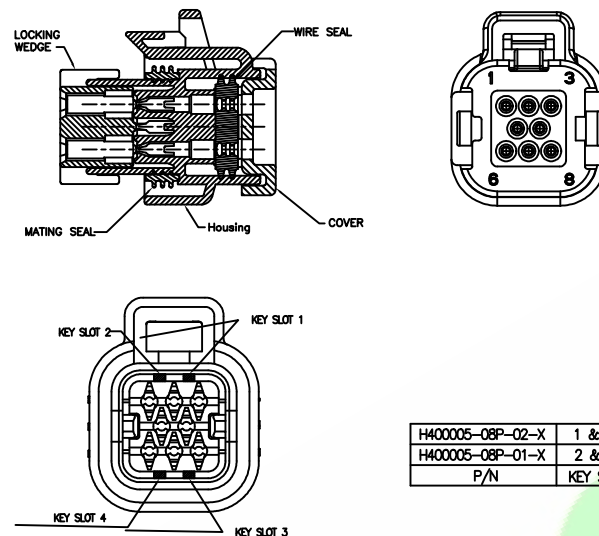


H400005-OBP-02-X	1 & 3
H400005-OBP-01-X	2 & 4
P/N	KEY SLOT

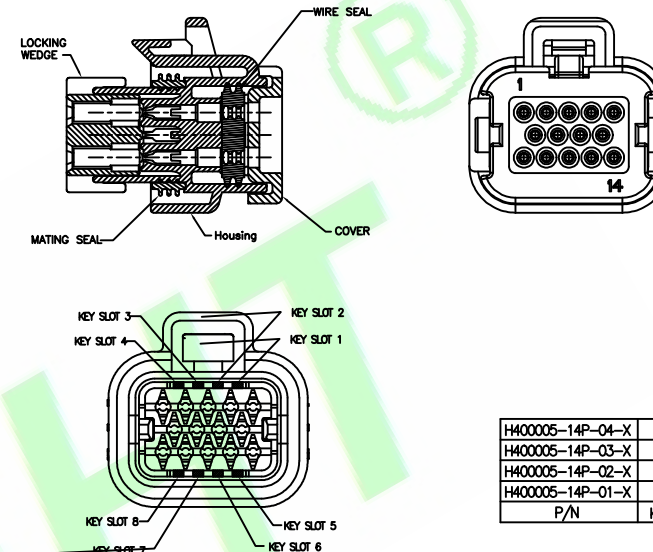

H400005-14P-04-X	3 10 5
H400005-14P-03-X	2 & 8
H400005-14P-02-X	1 & 6
H400005-14P-01-X	3 & 7
P/N	KEY SLOT

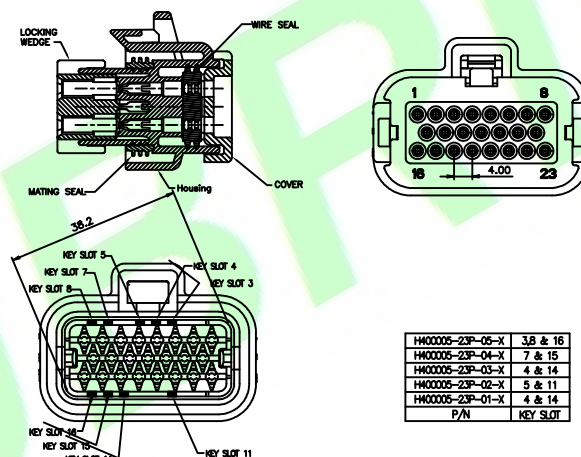

H400005-23P-05-X	3,8 & 16
H400005-23P-04-X	7 & 15
H400005-23P-03-X	4 & 14
H400005-23P-02-X	5 & 11
H400005-23P-01-X	4 & 14
P/N	KEY SLOT

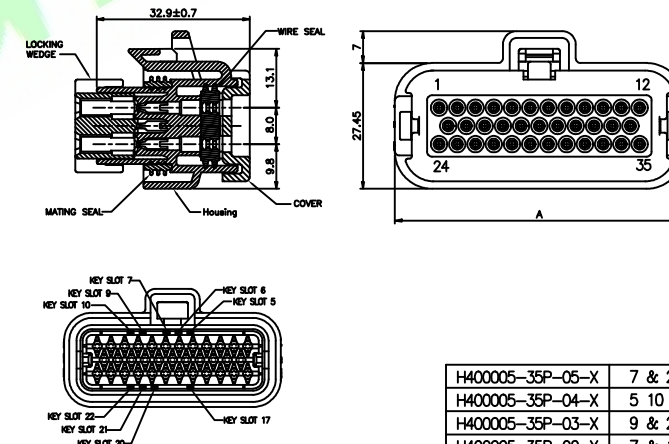

H400005-35P-05-X	7 & 22
H400005-35P-04-X	5 10 22
H400005-35P-03-X	9 & 21
H400005-35P-02-X	7 & 17
H400005-35P-01-X	6 & 20
P/N	KEY SLOT

2X	UpdatUpdate code option	DENG	20230410
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : H400005-XXP-XX-X
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.35	X': ±5.0°	TITLE : 4.0mm Pitch SEAL PLUG ASS
	X.X: ±0.25	X.X': ±3.0°	DATE: 10-Oct-2015
	X.XXX: ±0.15	X.XXX': ±1.0°	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4