


Material:
Terminal: Copper alloy

Rating:
Current Rating: 25 Amp
Temperature Range: $-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$

Ordering Information
H40012TF-PQ-01

1 2 3

1: — Series No.
2: — TF: Female Terminal
3: — Q: Tin Plated

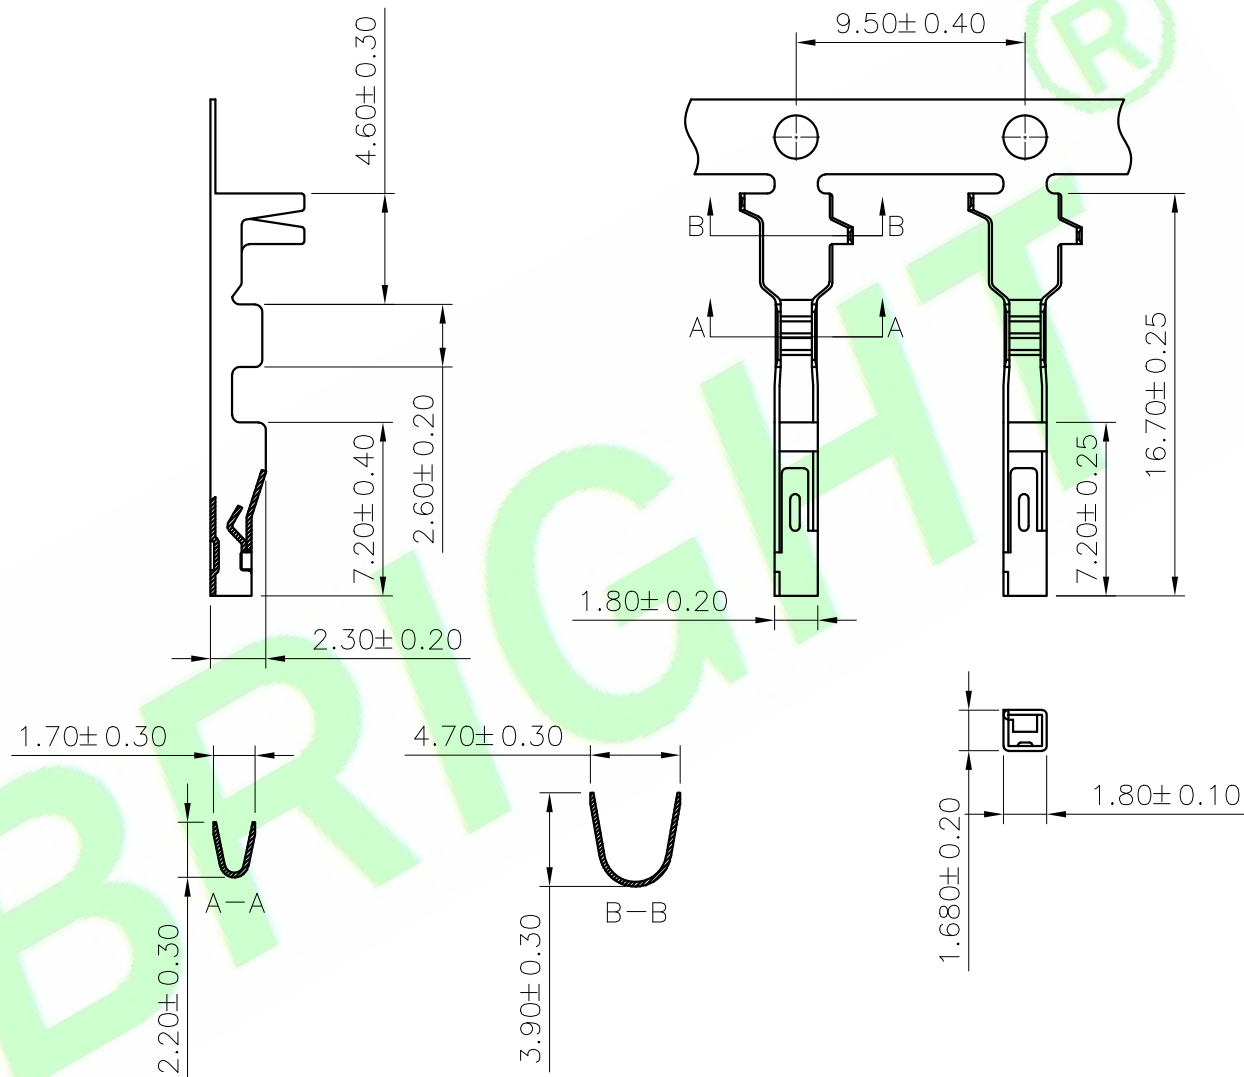

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : H40012TF-PQ-01	
CHKD.: Juddyan	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	X.: ± 0.50	X': $\pm 6.0^{\circ}$	TITLE :	
	X.X: ± 0.30	X.X': $\pm 3.0^{\circ}$	4.00 Pitch Female Terminal	
	X.XX: ± 0.20	X.XX': $\pm 2.0^{\circ}$	DATE: 08-Apr-2023	
	X.XXX: ± 0.10	X.XXX': $\pm 2.0^{\circ}$		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO