

RoHS Compliant








Automobile
Product

Specifications:
Material And Finish:
Insulator:PBT
Retainer:PA66
Seal:MVQ

Rating:
Operating Temperature Range:-40°~+130°C
Rated Voltage:12V


Ordering Information
H4001F-04P-XX-XA
1 2 3 4 5 6

- 1: — Series No.
2: — F:Female Housing
3: — No. of Positions
4: — 01:A Type
02:B Type
03:C Type
5: — Color:
B:Black
Y:Yellow
G:Gery
BL:Blue
6: — A:In Bag

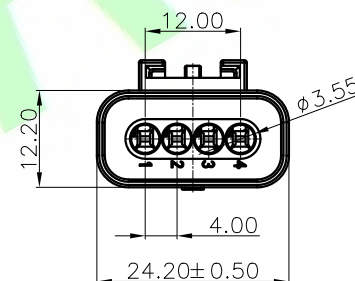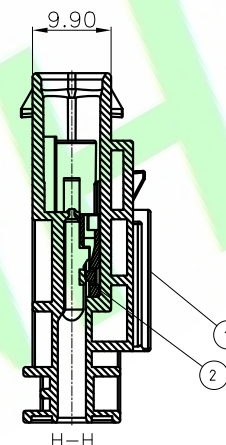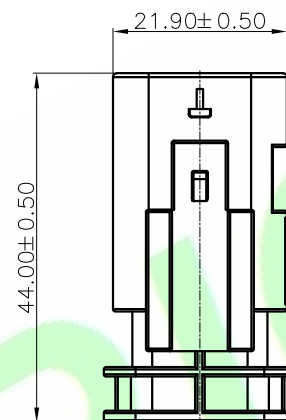


A Type

Color:
B:Black
Y:Yellow
BL:Blue



B Type

Color:
Y:Yellow
G:Gery



C Type

Color:
Y:Yellow

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : H4001F-04P-XX-XA	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ±0.40	x': REF±6°	TITLE : 4.00mm Female Housing 4Pos	
	x.x: ±0.35	x.x': ±3.0°		
APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0°	DATE: 23-Nov-2024	
	x.xxx: ±0.15	x.xxx':		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO