

RoHS Compliant



Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color:Black

Rating:

Current Rating:25 Amp

Voltage Rating:12V AC/DC

Operating Temperature Range:-40°~+130°C

Electrical:






Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

H4001M-02P-01-A

- 1: Series No.
2: Male Housing
3: No. of Positions
4: A: In Bag

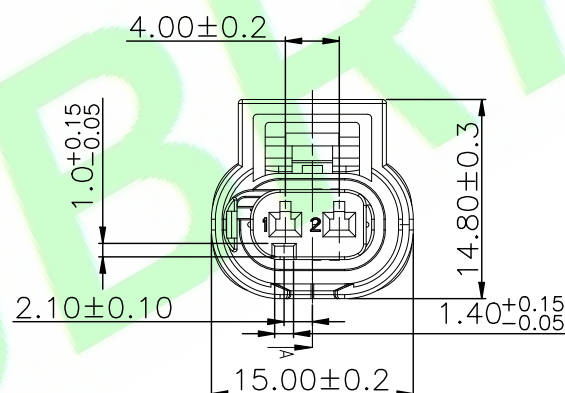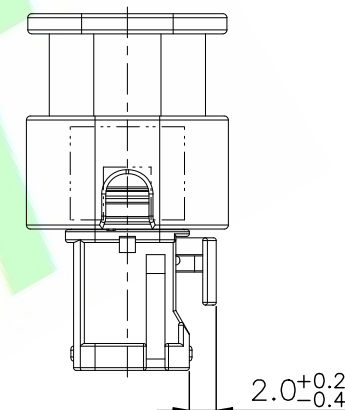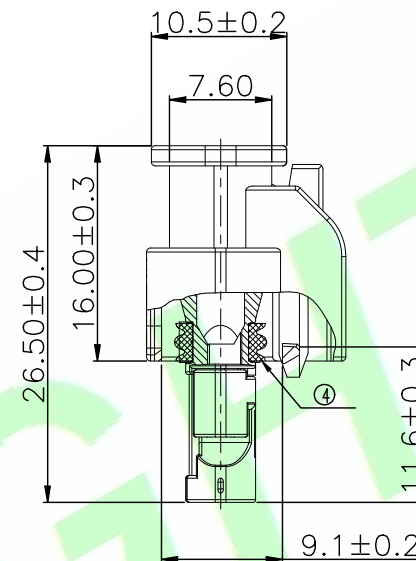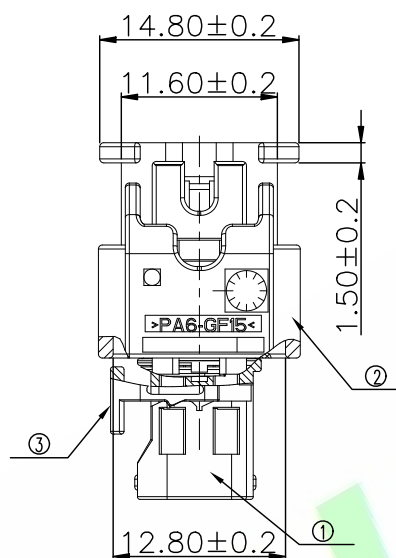

④	Seal MVQ-30	NATURAL	1PCS
③	Retainer PA66-GF15%	VIOLETT	1PCS
②	Protec.Cover PA66-GF15%	BLACK	1PCS
①	Recepticle Hsg PA66-GF30%	BLACK	1PCS
ITEM	Description	Color	QTY

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H4001M-02P-01-A		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Aren	X.: ±	X': ±5.0°	TITLE : 4.0mm Pitch Sealed Male Housing		SHEET: 1/1		A4
2X					X.X: ±0.30	X.X': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Zolin		APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 22-Aug-2021		THIRD ANGLE PROJECTION		