

RoHS Compliant



Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Color:Black



Rating:
Current Rating:25 Amp
Voltage Rating:12V AC/DC
Operating Temperature Range:-40~+130°C

Electrical:
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute






Ordering Information

H4001M-08P-01-A
1 2 3 4

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — A:In Bag



A-A

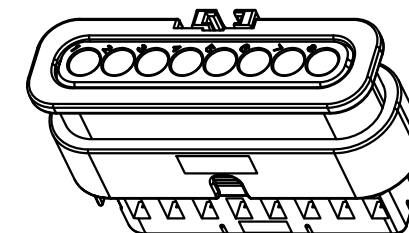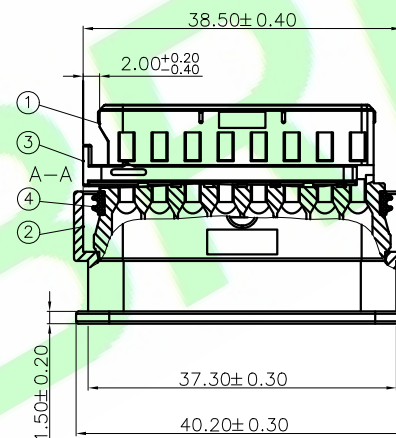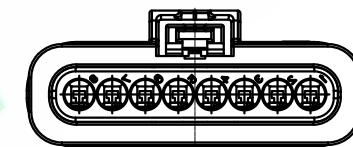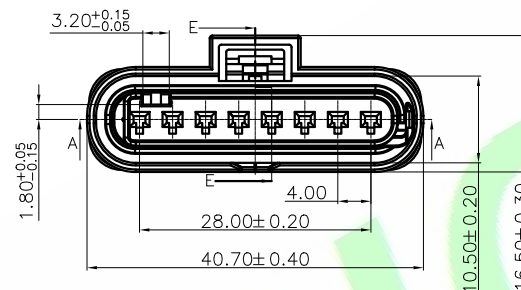

ITEM	Description	Color	QTY
①	Receptacle Hsg PA66-GF30%	Black	1PCS
②	Protec.Cover PA66-GF15%	Black	1PCS
③	Retainer PA66-GF15%	Violet	1PCS
④	Seal MVQ	Natural	1PCS

5X				DR.BY.:	
4X				JoinZm	
3X				CHKD.:	
2X				Judyyan	
1X	ORIGINAL	JoinZm		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±	x.: ±5.0°
x.x: ±0.30	x.x: ±3.0°
x.xx: ±0.20	x.xx: ±2.0°
x.xxx: ±0.10	x.xxx: ±1.0°

PART NO : H4001M-08P-01-A
DWG. NO.:
TITLE : 4.0mm Pitch Sealed Male Housing
DATE: 15-Apr-2023

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4