

Note:

Material: Phosphor Bronze

Wire Range: AWG #20-#16

Insulation Range: 1.70-2.70

Ordering Information

H4005T-PX

1 2 3






1: Series No.

2: T: Terminal

3: Y: Selective 30u" Gold plating

Q: Tin Plated

2X GT: 20u" Gold on contact; Tin on tail

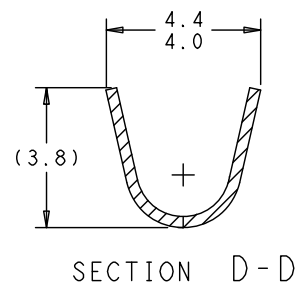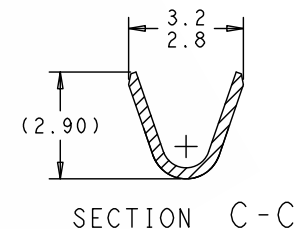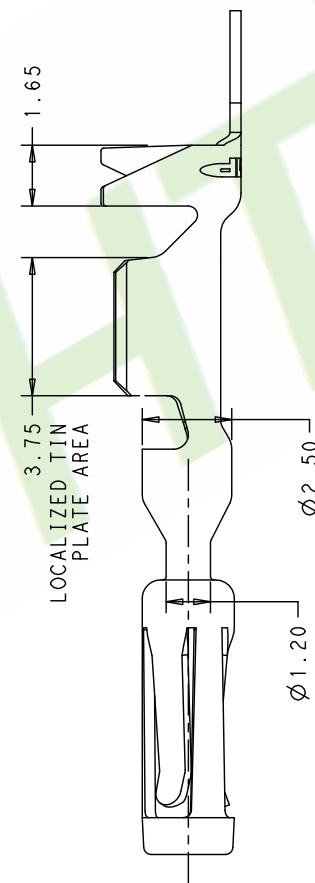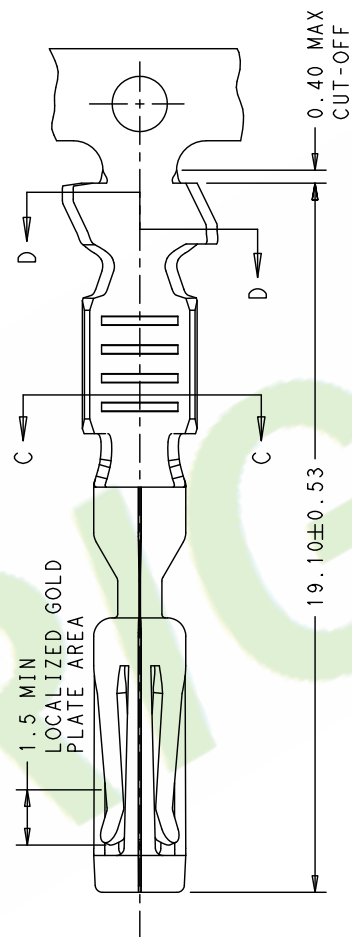

|      |                 |       |          |         |                    |               |                                   |                                                                        |  |            |                                                                                       |    |
|------|-----------------|-------|----------|---------|--------------------|---------------|-----------------------------------|------------------------------------------------------------------------|--|------------|---------------------------------------------------------------------------------------|----|
| 5X   |                 |       |          | DR.BY.: | GENERAL TOLERANCE: |               | PART NO : H4005T-PX               | <b>HJBRIGHT®</b> 东莞市華晶電子有限公司<br>BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED |  | SHEET: 1/1 |  | A4 |
| 4X   |                 |       |          | Jack    | LINEAR             | ANGLES        | DWG. NO.:                         |                                                                        |  |            |                                                                                       |    |
| 3X   |                 |       |          | CHKD.:  | x.: ±0.30          | x*: ±5.0°     | TITLE :<br><br>Connector terminal | SCALE: 1:1                                                             |  |            |                                                                                       |    |
| 2X   | Add plated code | Deng  | 20230420 | Kenry   | x.x: ±0.20         | x.x*: ±3.0°   |                                   | UNIT: mm                                                               |  |            |                                                                                       |    |
| 1X   | ORIGINAL        | Jack  |          | APPD.:  | x.xx: ±0.15        | x.xx*: ±2.0°  |                                   |                                                                        |  |            |                                                                                       |    |
| REV. | DESCRIPTION     | DR.BY | ECN. NO. | Billy   | x.xxx: ±0.10       | x.xxx*: ±1.0° | DATE: 11-Jan-2016                 |                                                                        |  |            |                                                                                       |    |