

Specifications:
Material And Finish:
Insulator: Nylon66 UL94V-0
Color: Natural





Rating:
Current Rating: 9A AC,DC(16AWG)
Voltage Rating: 600V AC,DC
Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:
Contact resistance: 10m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1500V AC/Minute

Ordering Information

H4140-XXP-A

1: — Series No.
2: — No. of Positions
3: — A: In Bag

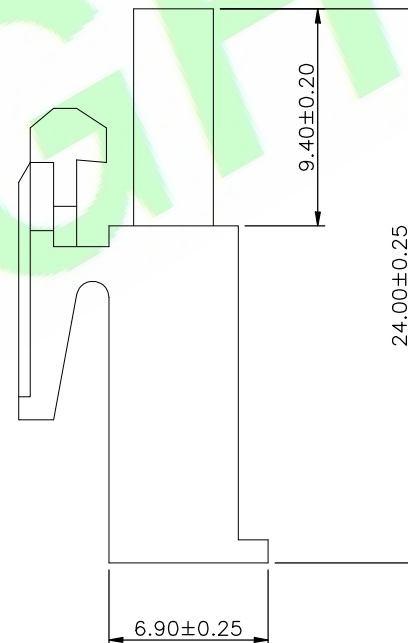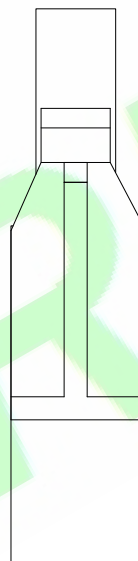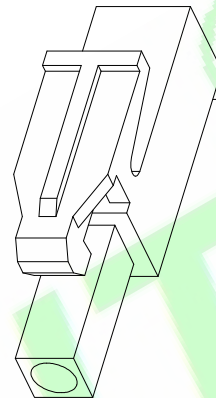

2X	Update encoding options	Judyyan	20250402
1X	ORIGINAL	Aaron	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : H4140-XXP-A	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Tony	X.: ± 0.30	X': $\pm 5.0^{\circ}$	TITLE : Pitch 4.14mm Housing	
	X.X: ± 0.25	X.X': $\pm 3.0^{\circ}$		
APPD.: Billy	X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$	DATE: 26-May-2017	
	X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$		

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4