

Specifications:**Material And Finish:**

Insulator:Nylon66 UL94V-0 Color:Natural

Rating:

Current Rating:9A AC,DC(16AWG)

Voltage Rating:600V AC,DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.



Withstanding Voltage:1500V AC/Minute

Ordering Information**H41400F-XXP-XA**



1 2 3 4 5

- 1: — Series No.
 2: — F:Female
 3: — No. of Positions
 4: — A:A Type
 B:B Type
 5: — A:In Bag

Poles	Dimensions (mm)	
	A	B
04P	4.14	9.80
06P	8.28	14.00
08P	12.42	18.20
10P	16.56	22.40
12P	20.70	26.60
14P	24.84	30.80
16P	28.98	35.00
18P	33.12	39.20
20P	37.26	43.40
22P	41.40	47.60
24P	45.54	51.80

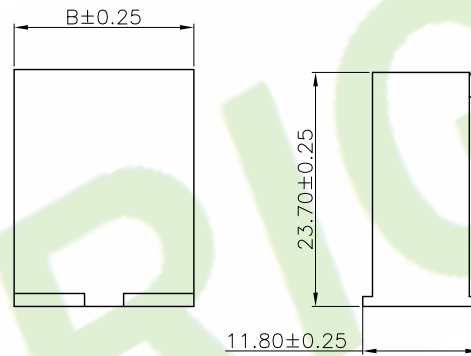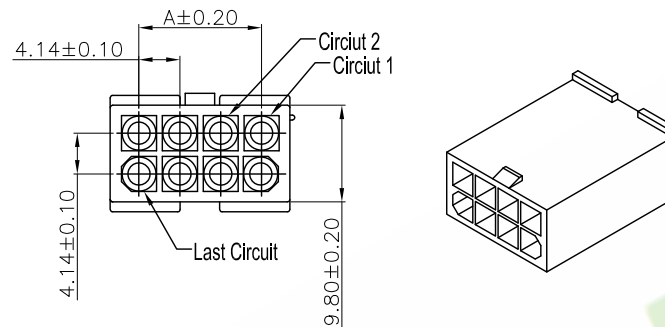

A Type

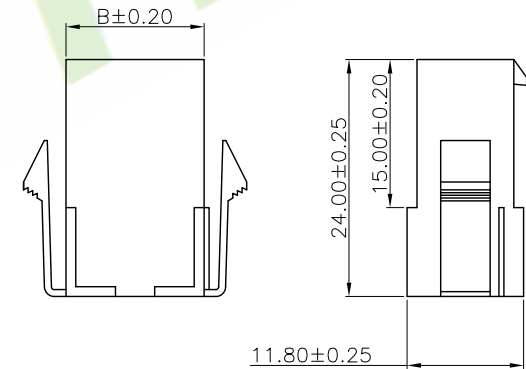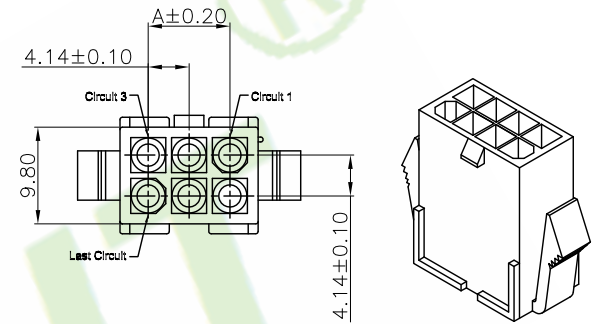

B Type

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : H41400F-XXP-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			A4
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 4.14mm Pitch Female Housing	SHEET: 1/1	THIRD ANGLE PROJECTION		
2X	Update code options	Judyyan	20220819		X.X: ±0.20	X.X': ±3.0°	DATE: 22-Feb-2012	SCALE: 1:1			
1X	ORIGINAL	Samson			X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°					