RoHS Compliant

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0 Color:Natural
Plated:See Ordering Information

Rating:
Current Rating:13Amp Max(16AWG Per pin)
Voltage Rating:600V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute





WITHOUT MOUNTING EARS

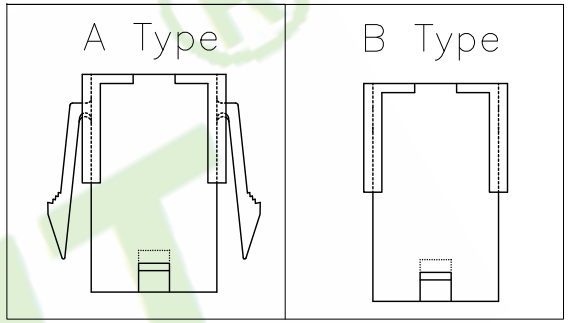

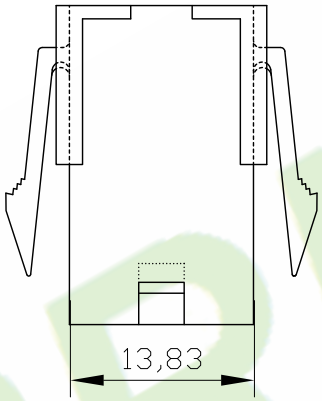

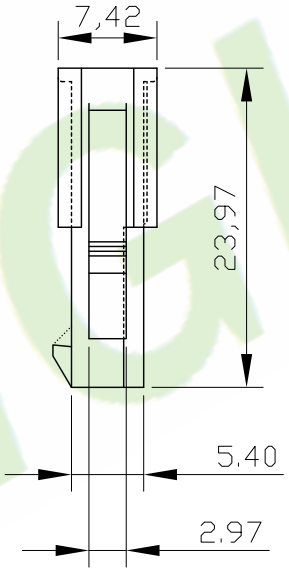

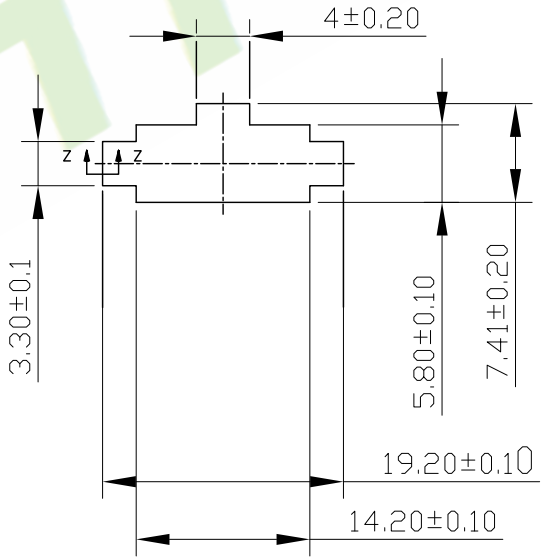

Ordering Information
H42011-XXP-01-XXA
1 2 3 4

1:—Series No.
2:—No. of Positions
3:—01: A Type
02: B Type
4:—A:InBag

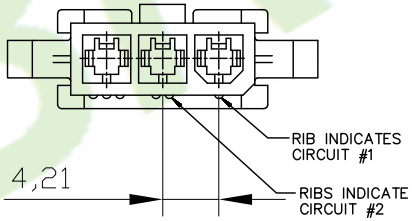

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X		Deng	20230701
1X	ORIGINAL	Bruce	

DR.BY.: Bruce
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	LINEAR	ANGLES
	X.:	X°: ±
	X.X: ±0.25	X.X°: ±6°
	X.XX: ±15	X.XX°: ±3°
	X.XXX: ±0.08	X.XXX°: ±2°

PART NO : H42011-XXP-01-XXA
DWG. NO.:
TITLE : 4.2mm Housing connector
DATE: 12-Jan-2014

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4

HJBRIGHT®