

RoHS Compliant

Specifications:
Material And Finish:
Insulator:Nylon 66 Color:Natural

Rating:
Current Rating:9.0 Amp
Voltage Rating:600V AC/DC
Operating Temperature Range:-25°~+85°C


Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

Ordering Information






H42012M-XXP-XA

1 2 3 4 5

- 1:— Series No.
2:— M:Male
3:— No. of Positions
4:— A:PA66 UL94V-0
B:PA66 UL94V-2
5:— A:In Type



2*1PIN

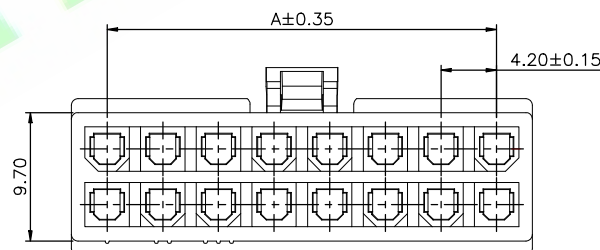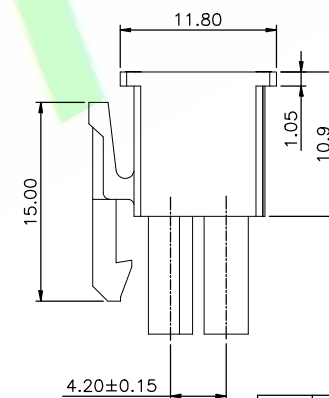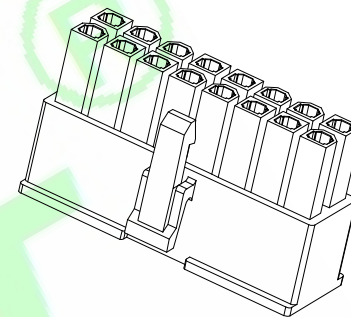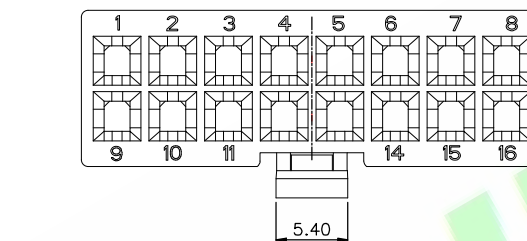

No.	Dimensions	
	A	B
02	---	5.40
04	4.20	9.60
06	8.40	13.80
08	12.60	18.00
10	16.80	22.20
12	21.00	26.40
14	25.20	30.60
16	29.40	34.80
18	33.60	39.00
20	37.80	43.20
22	42.00	47.40
24	46.20	51.60

DR.BY.:
Samson

CHKD.:
Tony

APPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES	
	X:	X°:
X.: ±0.30	X°: ±5.0°	
X.X: ±0.20	X.X°: ±3.0°	
X.XX: ±0.15	X.XX°: ±2.0°	
X.XXX: ±0.10	X.XXX°: ±1.0°	

PART NO : H42012M-XXP-XA

DWG. NO.: RD1202-001

TITLE :

MINI-FIT 4.2mm Pitch Housing

DATE: 22-Feb-2012

HJBRIGHT®

東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Update Code options	Judyyan	20250401
2X	Update Code options	Deng	20221104
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.