




Specifications:  
 Material And Finish:  
 Insulator:Nylon 66 Color:Natural

Rating:  
 Current Rating:9.0 Amp  
 Voltage Rating:600V AC/DC  
 Operating Temperature Range:-25~+85°C

Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:1000M ohm min.  
 Withstanding Voltage:1500V AC/Minute

Ordering Information  
 H4201M-XXP-01-XXA  
 1 2 3 4 5 6

- 1:— Series No.
- 2:— M:Male Housing
- 3:— No. of Positions
- 4:— A:PA66 UL94V-0  
B:PA66 UL94V-2
- 5:— B:Black  
N:Natural
- 6:— A:In Type

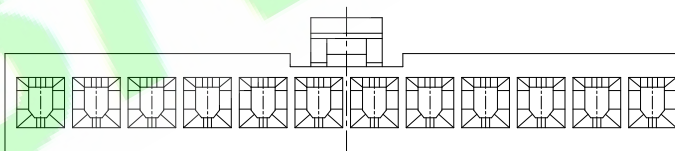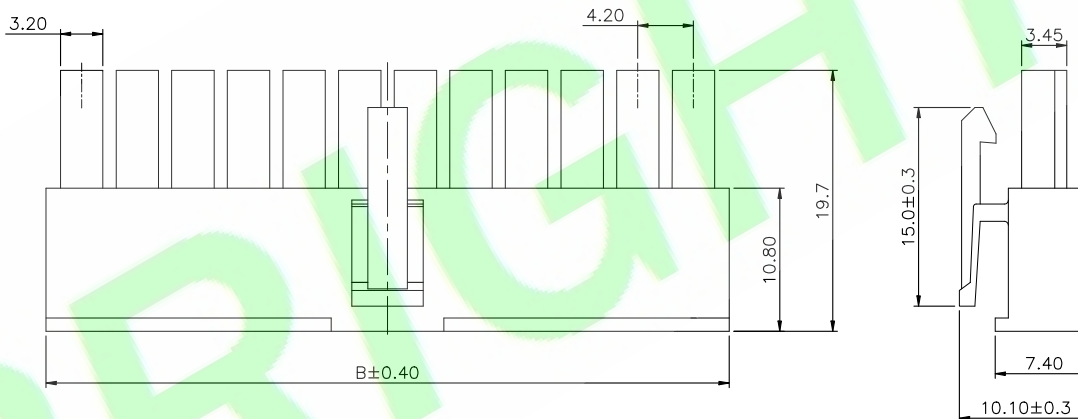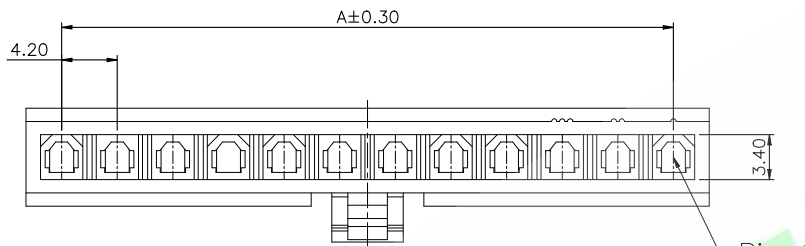


No.	Dimensions	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

DR.BY: Judyyan	GENERAL TOLERANCE:		PART NO : H4201M-XXP-01-XXA
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
	X.: ±0.40	X: ±5.0°	TITLE :
APPD.: Billy	X.X: ±0.30	X.X: ±3.0°	4.2mm Pitch Housing
	X.XX: ±0.20	X.XX: ±2.0°	DATE: 30-Apr-2024
	X.XXX: ±0.10	X.XXX: ±1.0°	

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED


SHEET: 1/2  
 SCALE: 1:1  
 UNIT: mm




**A4**

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


02P




08P

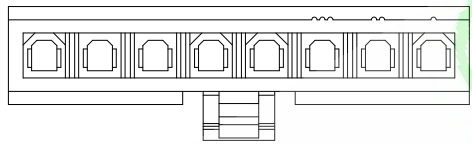


03P




09P

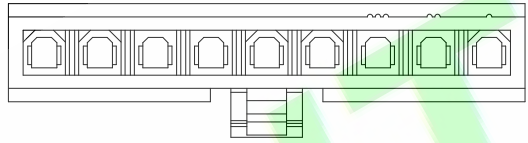


04P




10P

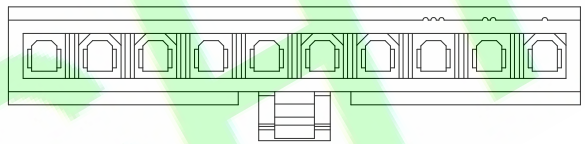


05P




11P

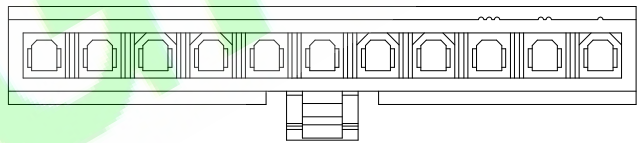


06P

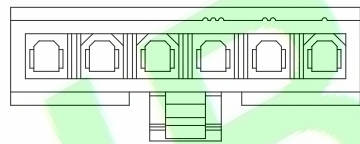

12P

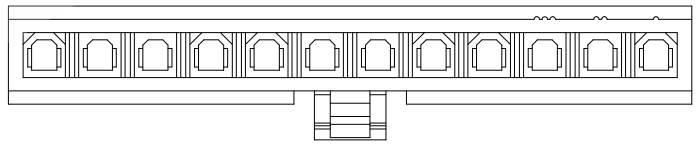

07P

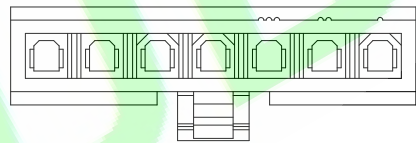

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan	
CHKD.:	GENERAL TOLERANCE:	
	LINEAR	ANGLES
	X.: ±0.40	X: ±5.0°
	X.X: ±0.30	X.X: ±3.0°
APPD.:	X.XX: ±0.20	X.XX: ±2.0°
	X.XXX: ±0.10	X.XXX: ±1.0°

PART NO :	H4201M-XXP-01-XXA
DWG. NO.:	
TITLE :	4.2mm Pitch Housing
DATE:	30-Apr-2024

**HJBRIGHT**® 東莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2  
SCALE: 1:1  
UNIT: mm

THIRD ANGLE PROJECTION

**A4**