

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0 Color:Natural

Plated:See Ordering Information

Rating:

Current Rating:13Amp Max(16AWG Per pin)

Voltage Rating:600V AC/DC





Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

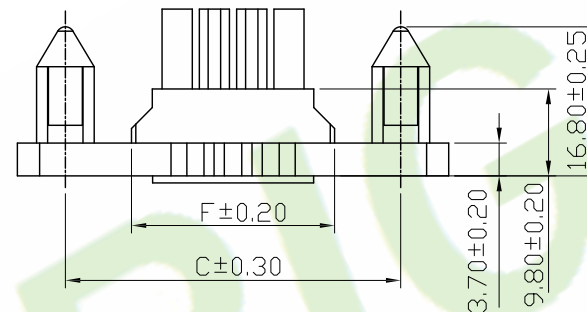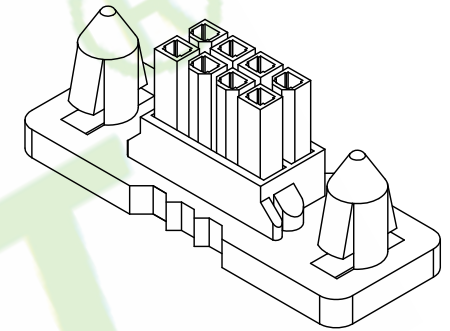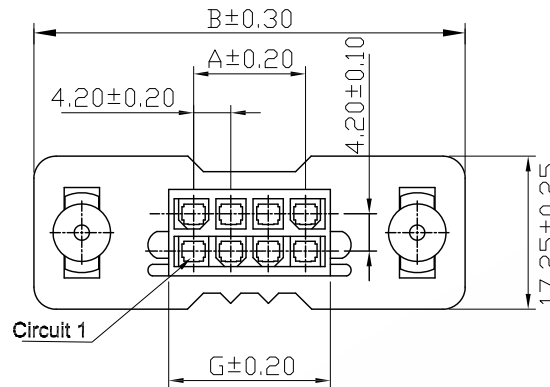

Ordering Information


H42022-XXP-01-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A:InBag

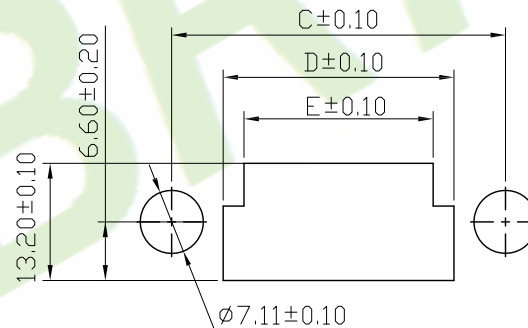

Circuits	Dimensions(mm)						
	A	B	C	D	E	F	G
2x1P	N/A	36.00	25.00	13.40	8.70	10.10	5.40
2x2P	4.20	40.20	29.20	17.60	12.90	14.30	9.60
2x3P	8.40	44.40	33.40	21.80	17.10	18.50	13.80
2x4P	12.60	48.60	37.60	26.00	21.30	22.70	18.00
2x5P	16.80	52.80	41.80	30.20	25.50	26.90	22.20
2x6P	21.00	57.00	46.00	34.40	29.70	31.10	26.40
2x7P	25.20	61.20	50.20	38.60	33.90	35.30	30.60
2x8P	29.40	65.40	54.40	42.80	38.10	39.50	34.80
2x9P	33.60	69.60	58.60	47.00	42.30	43.70	39.00
2x10P	37.80	73.80	62.80	51.20	46.50	47.90	43.20
2x11P	42.00	78.00	67.00	55.40	50.70	52.10	47.40
2x12P	46.20	82.20	71.20	59.60	54.90	56.30	51.60
2x18P	71.40	107.40	96.40	81.50	76.78	81.50	76.80

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H42022-XXP-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Bruce	LINEAR		DWG. NO.:				
3X				CHKD.:	ANGLES		TITLE :				
2X		Deng	20230701	Tony	X.:	X': ±	4.2mm Housing connector		SHEET: 1/1		A4
1X	ORIGINAL	Bruce		APPD.:	X.X: ±0.25	X.X': ±6°			SCALE: 1:1		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XX: ±15	X.XX': ±3°	DATE: 12-Jan-2014	UNIT: mm	THIRD ANGLE PROJECTION		
					X.XXX: ±0.08	X.XXX': ±2°					

A4