

Specifications:

Material And Finish:

Insulator:PA66-GF15,UL94V-0,

Color:Gray

Silicone seal ring:Color Red-Orange

Temperature Range:-40°C~+125°C

Rating current:7.5A

Working voltage:250V

Waterproofing grade:IP68,IP6K9K

Ordering Information

H4202F-02P-01-A





1 2 3 4

1: Series No.



2: F:Female Housing

3: No. of Positions

4: A:In Bag

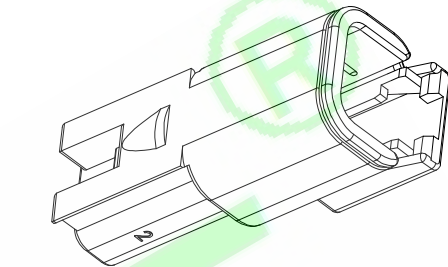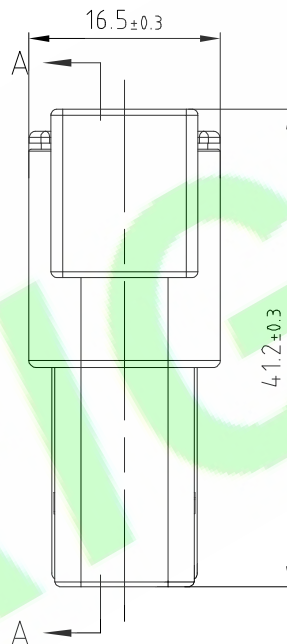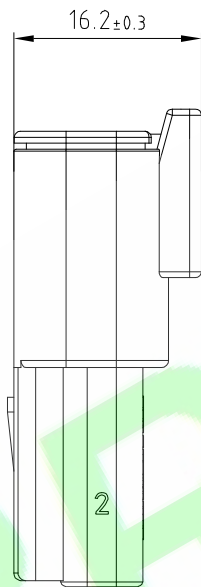


A-A

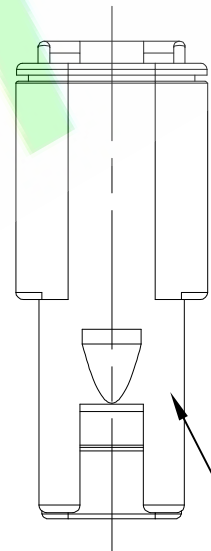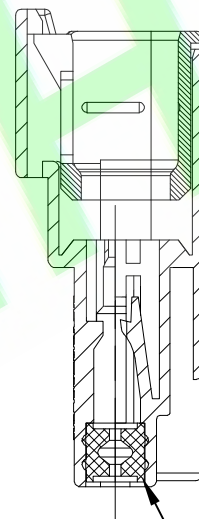

Housing

Silicone seal ring



DR.BY.:

Judyyan

CHKD.:

Hu.ch

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ±0.30

X': ±5.0°

X.X: ±0.20

X.X': ±3.0°

X.XX: ±0.15

X.XX': ±2.0°

X.XXX: ±0.10

X.XXX': ±1.0°

PART NO : H4202F-02P-01-A

DWG. NO.:

TITLE :

4.2mm Pitch Series Female Housing

DATE: 31-Dec-2024

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X

ORIGINAL

Judyyan

REV.

DESCRIPTION

DR.BY

ECN. NO.