







Specifications:  
Material And Finish:  
Insulator:PA66-GF15,UL94V-0,  
Color:Gray  
Silicone seal ring:Color Red-Orange

Temperature Range:-40°C~+125°C  
Rating current:7.5A  
Working voltage:250V

Waterproofing grade:IP68,IP6K9K


Ordering Information  
H445001F-04P-01-A  
1 2 3 4

1:—Series No.  
2:—M:Male Housing  
3:—No. of Positions  
4:—A:In Bag

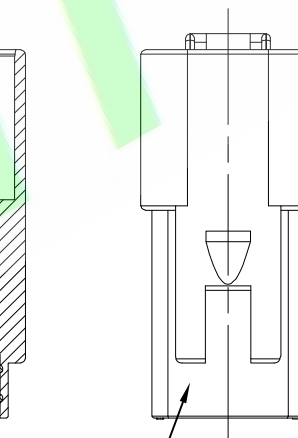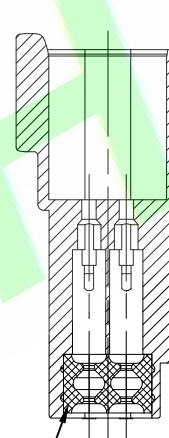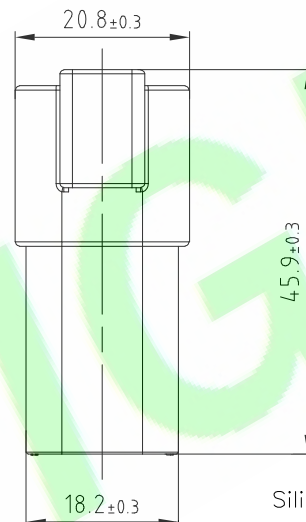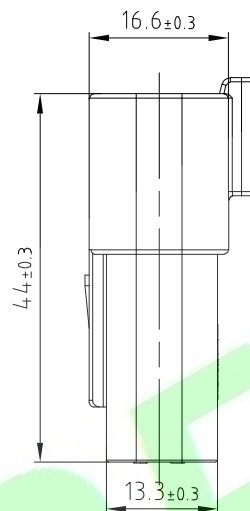

Silicone seal ring

Housing



|                    |                    |               |                                               |  |
|--------------------|--------------------|---------------|-----------------------------------------------|--|
| DR.BY.:<br>Judyyan | GENERAL TOLERANCE: |               | PART NO : H445001F-04P-01-A                   |  |
|                    | LINEAR             | ANGLES        | DWG. NO.:                                     |  |
| CHKD.:<br>Hu.ch    | X.: ±0.30          | X': ±5.0°     | TITLE :<br>4.45mm Pitch Series Female Housing |  |
|                    | X.X: ±0.20         | X.X': ±3.0°   |                                               |  |
| APPD.:<br>Billy    | X.XX: ±0.15        | X.XX': ±2.0°  | DATE: 31-Dec-2024                             |  |
|                    | X.XXX: ±0.10       | X.XXX': ±1.0° |                                               |  |

**HJBRIGHT®** 东莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
SCALE: 1:1  
UNIT: mm



THIRD ANGLE PROJECTION

A4

|      |             |         |         |
|------|-------------|---------|---------|
| 1X   | ORIGINAL    | Judyyan |         |
| REV. | DESCRIPTION | DR.BY   | ECN. NO |