

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 ,Color:Grey

Rating:

Current Rating:13.0 Amp (14AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:LCP:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2000V AC/Minute

Ordering Information

H445001F-12P-XX-A

1 2 3 4 5

1: — Series No.

2: — F:Female






3: — No. of Positions

3: — Key and colour option

01:A Type Gray


02:B Type Green

4: — A:In Bag

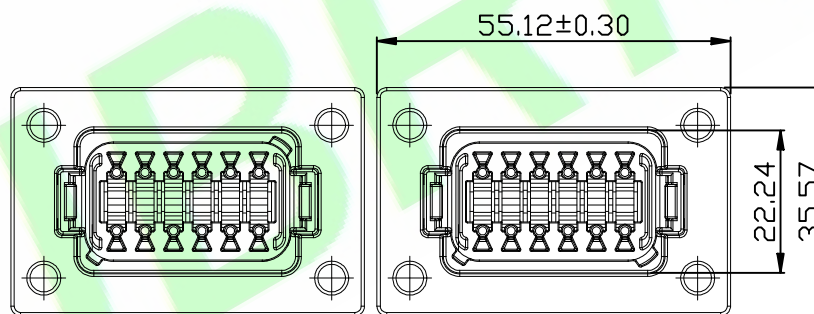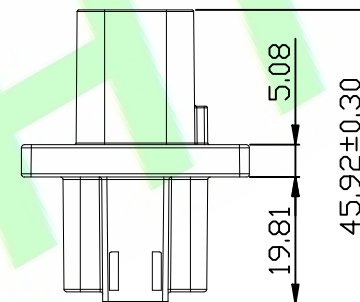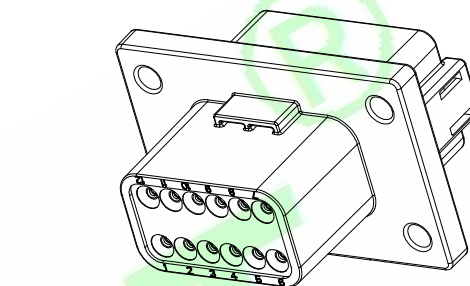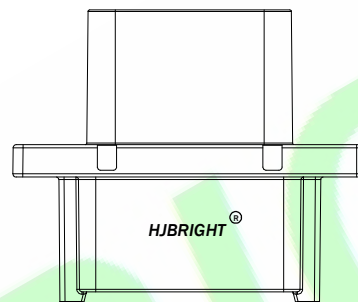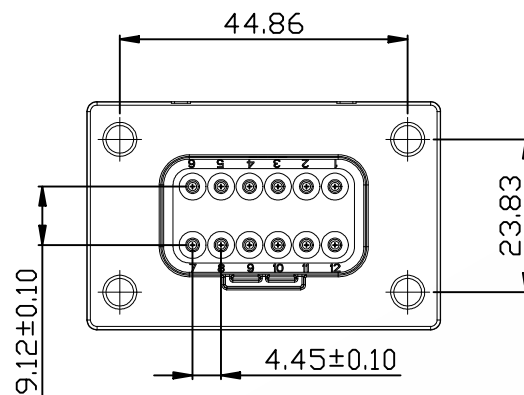


02 B Type Green

01 A Type Gray

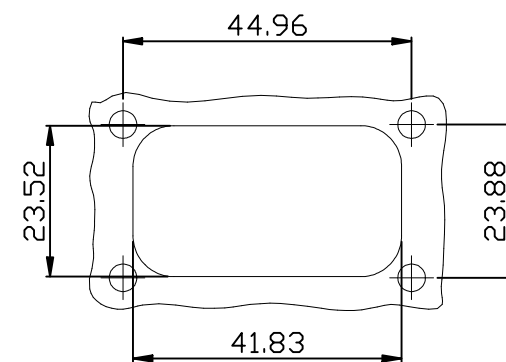

RECOMMENDED PANEL CUTOUT

5X				DR.BY.: Samson	GENERAL TOLERANCE:	PART NO : H445001F-12P-XX-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	DWG. NO.:		
3X				CHKD.: Tony	ANGLES	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	增加绿色防呆规格,更新料号	Judyyan	2023127	APPD.: Billy	X.: ±5.0°	9.12*4.45 Pitch Waterproof WTW Connector Female	SCALE: 1:1	
1X	ORIGINAL	Judyyan			X.X: ±0.30		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.20	DATE: 14-Jun-2021		
					X.XXX: ±0.10			
					X.XXX: ±1.0°			